

Automatic biofireplace

DALEX

Automatic biofireplace with an intelligent control system, equipped with an electronic controller, advanced safety sensors with automatic shutdown, and sound notifications.


Length: from 700 to 3000 mm

Height: 205 mm

Width: 280 mm

Includes:

- ✓ Remote control
- ✓ Voice guidance
- ✓ Protective glass

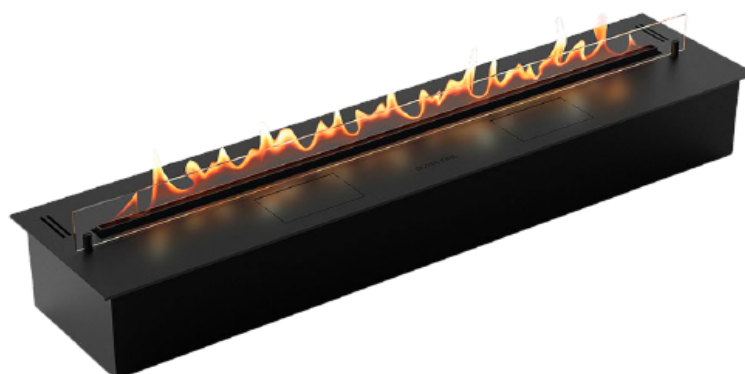

Characteristics



Hidden control panel	✓
Remote control	no extra charge (included)
Flame height adjustment	4 levels + favorite height
Fixing your favorite flame height	✓
Voice notifications	✓
Cooling system	✓
Fireplace blocking	✓
Locking the fuel tank	✓
Auto-shutdown	✓
Vapor combustion technology	✓
Safety sensors	✓
CO2 sensor	✓
Self-diagnosis	✓
Heat-resistant glass	no extra charge (included)
Glass fixing	✓
Faceplate 5mm	✓
Base color - black	✓
Glossy black front surface	optional
Decorative appearance	✓

Comparison table of automatic biofireplaces

	DALEX	DALEX Plus
Touch display		
6 flame levels		
External temperature sensor		
Sounds of nature		
Integration with Smart Home		
Mobile app for smartphone control		✓
Built-in auto refueling		✓
Multiple languages to choose from		✓
Connection to WiFi network		✓
Voice notifications	✓	✓
Remote control	✓	✓
Hidden control and refueling compartment	✓	✓
4 flame levels	✓	✓
Fixing your favorite flame height	✓	✓
Safety sensors	✓	✓
CO2 sensor	✓	✓
Self-diagnosis	✓	✓
Auto shutdown	✓	✓
Fireplace blocking	✓	✓
TVapor combustion technology	✓	✓
Cooling system	✓	✓
Heat-resistant glass	✓	✓
Glass fixing	✓	✓
Faceplate 5mm	✓	✓
Base color - black	✓	✓
Decorative appearance	✓	✓
Convenient installation	✓	✓

Specification

Biofireplace	Dimensions, L*W*H, mm	Length of the line of fire, mm	Block volume, liter	Thermal power, kW	Room volume, m3	Power consumption, W	Operating time, hour ' min
DALEX 700 Plus / Touch	700 x 280 x 205	600	3,0	3,8	38	40-1000	max 8`19
DALEX 800 Plus / Touch	800 x 280 x 205	700	3,4	4,5	45	40-1300	max 8`06
DALEX 900 Plus / Touch	900 x 280 x 205	800	3,8	5,8	58	40-1300	max 7`55
DALEX 1000 Plus / Touch	1000 x 280 x 205	900	4,4	7,1	71	40-1450	max 8`09
DALEX 1100 Plus / Touch	1100 x 280 x 205	1000	4,8	8,3	83	40-1450	max 8`0
DALEX 1200 Plus / Touch	1200 x 280 x 205	1100	5,2	9,5	95	40-1450	max 7`52

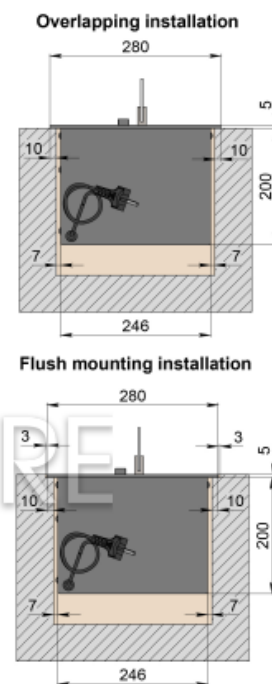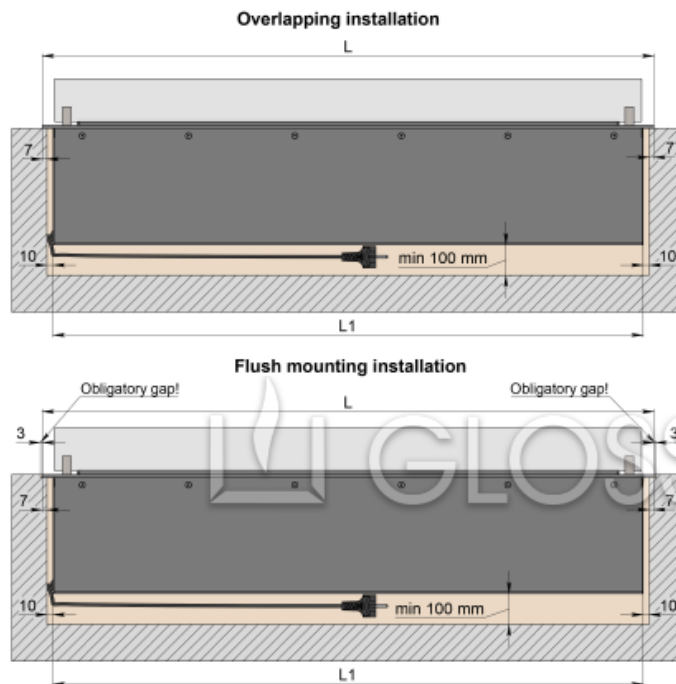

- Observe the dimensions shown in the drawing.
 - Make sure that the surface on which the biofireplace is based is horizontal and symmetrical.
 - Electrical connection - Euro socket Min. 3x1,5 mm², 230 V, 50 Hz, PE ⊕
- Attention!** The use of flammable, melting or deformable materials when finishing a niche is unacceptable. To install a niche, use use stone, brick, concrete, foam block, heat-resistant drywall followed by plaster. A niche for a fireplace can be made in a hollow wall, provided that there will be an additional partition underneath it, which will protect the line of fire from unwanted air flows.

Size	Automatic bio fireplace model Dalex																									
	D500	D600	D700	D800	D900	D1000	D1100	D1200	D1300	D1400	D1500	D1600	D1700	D1800	D1900	D2000	D2100	D2200	D2300	D2400	D2500	D2600	D2700	D2800	D2900	D3000
L, mm	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500	2600	2700	2800	2900	3000
L 1, mm	466	566	666	766	866	966	1066	1166	1266	1366	1466	1566	1666	1766	1866	1966	2066	2166	2266	2366	2466	2566	2666	2766	2866	2966