



fm

CALOR
NATURAL

2025

RANGE M WOOD STOVE

Front Cast Iron Interior <i>New Product</i>	Pages 10 - 11
Front Vermiculite Interior	Pages 12 - 13
Log Holder and Silk-screened Glass	Pages 14 - 16
Hood and Tangential Turbine	Page 17
Wall Mounted	Pages 18 - 21
Corner	Page 22
Front Oven and Plate Warmer <i>New Product</i>	Page 23
Front Oven	Pages 24 - 26
Corner Oven	Pages 27 - 28
Corner Oven and Tangential Turbine <i>New Product</i>	Page 29

RANGE CH BASIC WOOD STOVE

Front	Pages 32 - 33
Corner	Page 34
Front Oven	Pages 35 - 38
Corner Oven	Pages 39 - 42

RANGE HL WRAPAROUND WOOD OVEN

Front	Pages 44 - 45
Corner	Pages 46 - 47
Built-in	Pages 48 - 49

RANGE C METAL WOOD FIREPLACE



Front and Tangential Turbine Ductable	Pages 52 - 53
Front	Pages 54 - 55
Left and Right Corner	Pages 56 - 57
Corner	Pages 58 - 59
Central	Pages 60 - 61
Front Oven	Pages 62 - 63
Corner Oven	Pages 64 - 65

RANGE IC / IZ PANORAMIC INSERT

RANGE IC Hood and Centrifugal Turbine	Pages 68 - 69
RANGE IZ Tangential Turbine/ Centrifugal Turbine	Pages 70 - 71

RANGE IT WOOD INSERT

70 cm. Insert <i>New Design</i>	Pages 74 - 79
80 cm. Insert	Pages 80 - 85
100 cm. Insert	Pages 86 - 90
65 cm. Insert. Reduced Dimensions	Page 91
70 cm. Insert with Oven <i>New Product</i>	Page 92
80 cm. Insert with Oven	Page 93



RANGE IP PELLET INSERT

Insert 9,5 KW

Page 96

Insert 10,5 KW

Page 97

RANGE BP PELLET STOVE

Hydro Stove- 15 kw to Water

Page 100

Front 7,5 KW *New Display*

Page 101

Front 10 KW

Page 102

Front 10 KW Integrated Wifi *New Product*

Page 103

Corner 10 KW

Page 104

Front 11,5 KW

Page 105

Front 12 KW

Page 106

Front 12 KW Ductable *New Product*

Page 107

Front 17,5 KW

Page 108

Front 17,5 KW Ductable

Page 109

Hallway 9 KW *New Product*

Page 110

Hallway 12 KW Ductable

Page 111

RANGE FUSION WOOD BARBECUES WITH OVEN

Grill, Elevator and Doors *New Product*

Page 114

Grill and Elevator

Page 115

Manual Elevator

Page 116

Support Furniture

Page 117

RANGE BF BIG SIZE WOOD BARBECUE

Manual Grill

Page 120

Support Furniture

Page 121

STAINLESS STEEL GRILL

Stainless Steel Grill with Elevator

Page 122

RANGE BH HOME BUILT-IN BARBECUE

Round with Plate Warmer

Page 123

With Fans, Oven and Doors

Page 126

Built-in with Oven

Page 127

Built-in without Doors

Page 128

Built-in with Doors

Page 129

ACCESSORIES AND ADD-ONS

Wood

Pages 131 - 133

Pellets

Page 134

Barbecues

Page 135



FRONT
MEASUREMENT



BUILT-IN
MEASUREMENT



GRIDLE SIZE



USABLE OVEN
SPACE



OVEN/BBQ
GRILL



ARGENTINIAN
GRILL



STAINLESS STEEL
GRILL



PAELLA
STAND



The FM Group was founded in 1966 and is currently made up of three business lines: **electric heating** and **ventilation, industrial ovens**, and **biomass**. FM was established with the goal of providing the most innovative and efficient solutions in sectors as diverse as electric heating systems, the HORECA sector, and the natural heat of biomass, always aiming to meet the most demanding needs of our customers.

Our facilities have been recently modernized with a **contemporary** and **cutting-edge design**, covering an area of **30,000 m²** and supported by a team of approximately 200 professionals. Our professionalism, combined with our continuous investment in R&D, allows us to design and manufacture products that combine innovation, quality, and reliability.

Today, we not only serve the national market, but also export our products to over **65 countries**, earning international recognition across diverse markets and cultures, where we are trusted by millions of users and professionals.





At FM, **innovation** is what drives us forward. Our technical team is constantly researching and developing new, multifunctional products that not only meet today's market needs but also adapt to changing consumer habits. We are also firmly committed to **sustainability and environmental responsibility**.

Our solutions are designed with the planet in mind, aiming to **reduce carbon emissions** and promote cleaner, more responsible energy use. We integrate eco-friendly technologies that support a **greener future** without compromising on performance or design.

Every product we make undergoes strict **quality** control to ensure it is reliable, **durable** and **efficient**. Our commitment to quality is reflected in the satisfaction of our customers, who value the trust, efficiency, and design that define everything we produce.


At FM, we don't just build heating systems, we build **trust, innovation**, and a better future, which is why professionals around the world continue to choose FM.





CERTIFICATION ISO:9001

This recognized certification demonstrates that FM has an established and effective **quality management system**. It reflects our **commitment** to excellence and continuous improvement. We strive for both effectiveness and efficiency in our processes, which helps reduce costs and bring added value to our customers.

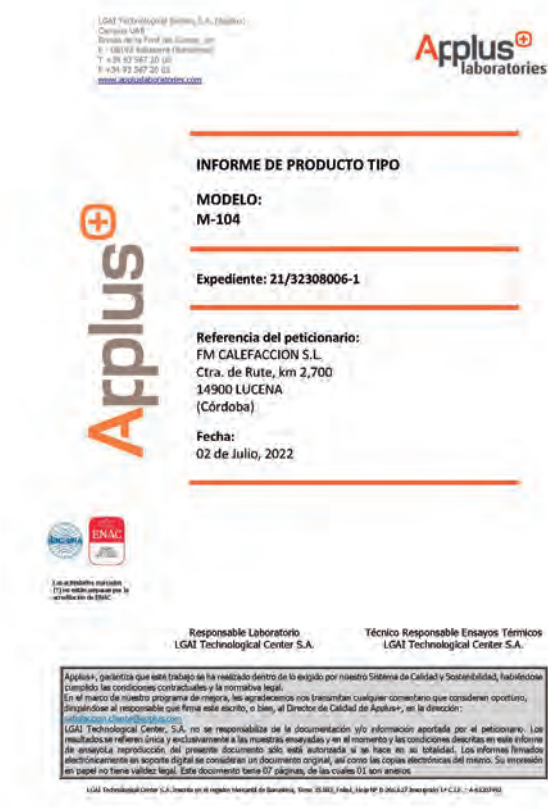


EUROPEAN REGULATION ON CONSTRUCTION PRODUCTS (EU) No. 305/2011
ECODESIGN REQUIREMENTS APPLICABLE TO BIOMASS STOVES UNDER REGULATION (EU) 2015/1185
EN 13240:2002/A2:2005/AC:2006/AC:2007
EN 13229:2001/A1:2003/A2:2005/AC:2006/AC:2007

This document confirms that our company complies with the **legal and regulatory requirements** established by the European Union for the commercialization and distribution of our products. It **certifies** that our products and services are of high quality and ensure the safety, well-being, and health of consumers.



MISSION

Our **mission** is to offer our customers the **best** and the **widest variety** of products with the **highest quality** and **impeccable service** without ever compromising the core values that define us.



VISION

We aim to position ourselves as the **ideal choice** for both current and potential customers. Our goal is to stand out in the market by being a reliable and high-quality option



SOCIAL RESPONSIBILITY

At **FM Biomass**, we strive to contribute to meaningful improvements that promote **progress** and **drive society forward**. We are committed to ensuring social well-being, health, and safety for all.



LABOUR RESPONSIBILITY

We encourage our employees to **engage** with the company's goals and values by offering them a **safe, supportive** and **positive** work environment.



ENVIRONMENTAL RESPONSIBILITY

We actively promote and implement initiatives that foster **sustainable** and **environmentally responsible** industrial growth.





WOOD STOVES

gama



Wood-burning stoves are the ideal solution to provide heat in a simple, economical and decorative way. They stand out for their ease of installation and low cost compared to other heating systems.


M





WOOD STOVE CAST IRON INTERIOR **M-108 PF**

NEW



9,5 - 12 kW



81%



0,08 %



35,00 mg/Nm³



65 cm



ø 150 mm



260 m³



75 Kg



648 x 504 x 713 mm
Width x Depth x Height

**Black
Finish**

NEW

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Cast Iron Interior
Cast Iron Door and Grate
Double Combustion System
Male Cast Iron Flue Outlet


ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



DATASHEET



WOOD STOVE CAST IRON INTERIOR M-170 PF



12,5 - 17 kW



81 %



0,12 %



18,04 mg/Nm³



62 cm



ø 150 mm



335 m³



102 Kg



648 x 464 x 740 mm
Width x Depth x Height



NEW

Black
Finish

Stainless Steel Kitchen Cooktop



Datasheet

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Cast Iron Interior
Male Cast Iron Flue Outlet


Cast Iron Door and Grate
Double Combustion System

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Stainless Steel Kitchen Cooktop



WOOD STOVE WITH VERMICULITE INTERIOR M-101



11 - 15 kW



82 %



0,11 %



20,68 mg/Nm³



50 cm



ø 150 mm



305 m³



59 Kg



571 x 460 x 717 mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Cast Iron Door and Grate
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



WOOD STOVE WITH PLATE WARMER M-102



11 - 15 kW



82 %



0,11 %



20,68 mg/Nm³



50 cm



ø 150 mm



305 m³



73 Kg



579 x 504 x 780 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick

Removable Ash Drawer

Vermiculite Interior

Cast Iron Door and Grate

Double Combustion System

Rear Flue Outlet

Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)


Drip-Proof Sleeve ø 150 mm. Vitrified Black



Datasheet



FRONT WOOD STOVE WITH LOG HOLDER WITHOUT FANS



	KW	%	m^3/h	mg/Nm^3	cm	mm	m^3	Kg	Width x Depth x Height
M-170 LK	12,5-17 kW	81 %	0,12 %	18,04 mg/Nm^3	62 cm	$\varnothing$ 150 mm	335 m^3	120 Kg	679 x 492 x 946,5 mm
M-180 LK	13-18 kW	81 %	0,07 %	35,65 mg/Nm^3	75 cm	$\varnothing$ 200 mm	340 m^3	147 Kg	839 x 493 x 1060 mm
M-100 LK	13,5-19 kW	81 %	0,10 %	30,10 mg/Nm^3	95 cm	$\varnothing$ 200 mm	360 m^3	195 Kg	1005 x 493 x 1060 mm



M-170 LK



Datasheet



M-180 LK



Datasheet



M-100 LK



Datasheet

Constructed from Steel up to 4 mm thick
Double Combustion and Clean Glass systems
Male Cast Iron Flue Outlet
Silk-screened Glass 750°C
Cast Iron Door and Grate
Double Combustion Chamber
Vermiculite Interior
Removable Ash Drawer

ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)


SPECIAL FINISH- SILK-SCREENED GLASS
Model M-100 LK

ROBAX® NightFlame

Elegant – with or without fire



3-SIDED FRONT WOOD STOVE WITH LOG HOLDER AND FANS



	KW	%	%	mg/Nm³	cm	ø mm	m³	KG	Width x Depth x Height
M-173 LK	12,5-17 kW	81 %	0,12 %	18,04 mg/Nm³	62 cm	ø 150 mm	335 m³	108 Kg	679 x 492 x 946,5 mm
M-183 LK	13-18 kW	81 %	0,07 %	35,65 mg/Nm³	75 cm	ø 200 mm	340 m³	140 Kg	839 x 493 x 1060 mm
M-103 LK	13,5-19 kW	81 %	0,10 %	30,10 mg/Nm³	95 cm	ø 200 mm	360 m³	188 Kg	1001 x 493 x 1060 mm



Black
Finish



M-173 LK



Datasheet



183 LK



Datasheet



M-103 LK



Datasheet

Constructed from Steel up to 4 mm thick
Double Combustion and Clean Glass systems
Male Cast Iron Flue Outlet
Silk-screened Glasses 750 °C
Cast Iron Door and Grate
Axial Fans 160 m³/h and 20 W
3 positions switch, Safety Mode Position 0
Double Combustion Chamber
Vermiculite Interior
Removable Ash Drawer

ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve Vitrified Black
Analog Fan Speed Controller
Wall Protection Steel Plate 900 x 705 mm (Black Color)


**SPECIAL FINISH- SILK-
SCREENED GLASS**
Model M-103 LK

ROBAX® NightFlame

Elegant – with or without fire



2-SIDED FRONT WOOD STOVE WITH LOG HOLDER AND FANS



	KW	%					m ³	KG	Width x Depth x Height
M-172 LK	12,5-17 kW	81 %	0,12 %	18,04 mg/Nm ³	62 cm	ø 150 mm	335 m ³	117 Kg	710 x 454 x 949,5 mm
M-182 LK	13-18 kW	81 %	0,07 %	35,65 mg/Nm ³	75 cm	ø 200 mm	340 m ³	159 Kg	780 x 525 x 1010 mm
M-122 LK	13,5-19 kW	81 %	0,10 %	30,10 mg/Nm ³	95 cm	ø 200 mm	360 m ³	193 Kg	947,5 x 490 x 1060 mm



Black
Finish



M-172 LK



Datasheet



M-182 LK



Datasheet



M-122 LK



Datasheet

Constructed from Steel up to 4 mm thick
Double Combustion and Clean Glass systems
Male Cast Iron Flue Outlet
Silk-screened Glasses 750 °C
2 Doors and Grate made of Cast Iron
Axial Fans 160 m³/h and 20 W
3 positions switch, Safety Mode Position 0
Double Combustion Chamber
Vermiculite Interior
Removable Ash Drawer

ACCESSORIES/ ADD-ONS (Ver páginas 131 - 133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve Vitrified Black
Analog Fan Speed Controller


**SPECIAL FINISH- SILK-
SCREENED GLASS**
Model M-122 LK

ROBAX® NightFlame

Elegant – with or without fire



FRONT WOOD STOVE WITH HOOD AND TANGENTIAL TURBINE DUCTABLE



12,5 - 17 kW



81 %



0,12 %



18,04 mg/Nm³



62 cm



ø 150 mm



335 m³



100 Kg



690 x 487 x 1080 mm
Width x Depth x Height



**Black
Finish**



M-300
Without Turbines
Vermiculite Interior



M-300 TFK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick

Removable Ash Drawer

Cast Iron Door and Grate

Double Combustion System

Turbine in OFF Mode with switch in Position 0

ACCESSORIES/ ADD-ONS (See pages 131-133)

2 Nozzles Ø 120 mm for Air Ducting

800°C Heatproof Spray Paint 375 ml. (Black Color)

Drip-Proof Sleeve ø 150 mm. Vitrified Black

Wall Protection Steel Plate 900 x 705 mm (Black Color)


Analog Fan Speed Controller



Datasheet



WALL MOUNTED WOOD STOVE WITH FANS AND VERMICULITE INTERIOR



	KW	%	m^3/h	mg/Nm^3	cm	mm	m^3	Kg	Width x Depth x Height
M-170 K	12,5-17 kW	81 %	0,12 %	18,04 mg/Nm^3	62 cm	$\varnothing$ 150 mm	335 m^3	95 Kg	668 x 492 x 555 mm
M-180 K	13-18 kW	81 %	0,07 %	35,65 mg/Nm^3	75 cm	$\varnothing$ 200 mm	340 m^3	122 Kg	839 x 493 x 620 mm
M-100 K	13,5-19 kW	81 %	0,10 %	30,10 mg/Nm^3	95 cm	$\varnothing$ 200 mm	360 m^3	170 Kg	1001 x 493 x 620 mm



Black
Finish



Datasheet

M-170 K
Vermiculite Interior



Datasheet

M-180 K
Vermiculite Interior



Datasheet

M-100 K
Vermiculite Interior

Constructed from Steel up to 4 mm thick
Double Combustion System
Male Cast Iron Flue Outlet
Cast Iron Door and Grate
Axial Fans 160 m^3/h y 20W
3 positions switch, Safety Mode Position 0
Double Combustion Chamber
Removable Ash Drawer

ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Analog Fan Speed Controller


**SPECIAL FINISH- SILK-
SCREENED GLASS**
Model M-100 K

ROBAX® NightFlame

Elegant – with or without fire



WALL MOUNTED WOOD STOVE WITH FANS AND CAST IRON INTERIOR



	KW	%	m^3/h	mg/Nm^3	cm	mm	m^3	KG	Width x Depth x Height
M-170 FK	12,5-17 kW	81 %	0,12 %	18,04 mg/Nm^3	62 cm	$\varnothing$ 150 mm	335 m^3	105 Kg	668 x 492 x 555 mm
M-180 FK	13-18 kW	81 %	0,07 %	35,65 mg/Nm^3	75 cm	$\varnothing$ 200 mm	340 m^3	132 Kg	839 x 493 x 620 mm
M-100 FK	13,5-19 kW	81 %	0,10 %	30,10 mg/Nm^3	95 cm	$\varnothing$ 200 mm	360 m^3	180 Kg	1000 x 493 x 620 mm



Black
Finish



Datasheet

M-170 FK
Cast Iron Interior



Datasheet

M-180 FK
Cast Iron Interior



Datasheet

M-100 FK
Cast Iron Interior

Constructed from Steel up to 4 mm thick
Double Combustion System
Male Cast Iron Flue Outlet
Silk-screened Glass 750°C
Cast Iron Door and Grate
Axial Fans 160m³/h y 20W
Safety Thermostat Set to Position 0
Double Combustion Chamber

ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Analog Fan Speed Controller


**SPECIAL FINISH- SILK-
SCREENED GLASS**
Model M-100 FK

ROBAX® NightFlame

Elegant – with or without fire



3-SIDED WALL MOUNTED WOOD STOVE WITH FANS AND VERMICULITE INTERIOR



									
	KW	%							Width x Depth x Height
M-173 K	12,5-17 kW	81 %	0,12 %	18,04 mg/Nm ³	62 cm	ø 150 mm	335 m ³	83 Kg	668 x 492 x 555 mm
M-183 K	13-18 kW	81 %	0,07 %	35,65 mg/Nm ³	75 cm	ø 200 mm	340 m ³	115 Kg	839 x 493 x 620 mm
M-103 K	13,5-19 kW	81 %	0,10 %	30,10 mg/Nm ³	95 cm	ø 200 mm	360 m ³	163 Kg	1001 x 493 x 620 mm



Black
Finish



Datasheet

M-173 K
Vermiculite Interior



Datasheet

M-183 K
Vermiculite Interior



Datasheet

M-103 K
Vermiculite Interior

Constructed from Steel up to 4 mm thick
Double Combustion System
Male Cast Iron Flue Outlet
Silk-screened Glasses 750 °C
Cast Iron Door and Grate
Axial Fans 160m³/h y 20W
Safety Thermostat Set to Position 0
Double Combustion Chamber

ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Analog Fan Speed Controller


**SPECIAL FINISH- SILK-
SCREENED GLASS**
Model M-103 K

ROBAX® NightFlame

Elegant – with or without fire



3-SIDED WALL MOUNTED WOOD STOVE WITH FANS AND CAST IRON INTERIOR



	KW	%	0,12 %	18,04 mg/Nm ³	62 cm	ø 150 mm	335 m ³	93 Kg	Width x Depth x Height
M-173 FK	12,5-17 kW	81 %	0,12 %	18,04 mg/Nm ³	62 cm	ø 150 mm	335 m ³	93 Kg	668 x 492 x 555 mm
M-183 FK	13-18 kW	81 %	0,07 %	35,65 mg/Nm ³	75 cm	ø 200 mm	340 m ³	124 Kg	839 x 493 x 620 mm
M-103 FK	13,5-19 kW	81 %	0,10 %	30,10 mg/Nm ³	95 cm	ø 200 mm	360 m ³	174 Kg	1001 x 493 x 620 mm



Datasheet

M-173 FK
Cast Iron Interior



Datasheet

M-183 FK
Cast Iron Interior



Datasheet

M-103 FK
Cast Iron Interior

Constructed from Steel up to 4 mm thick
Double Combustion System
Male Cast Iron Flue Outlet
Silk-screened Glasses 750 °C
Cast Iron Door and Grate
Axial Fans 160m³/h y 20W
Safety Thermostat Set to Position 0
Double Combustion Chamber

ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Analog Fan Speed Controller


**SPECIAL FINISH- SILK-
SCREENED GLASS**
Model M-103 FK

ROBAX® NightFlame

Elegant – with or without fire



CORNER WOOD STOVE M-105



11 - 15 kW



82 %



0,11 %



20,68 mg/Nm³



50 cm



ø 150 mm



305 m³



65 Kg



774 x 539 x 715 mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Cast Iron Door and Grate
Double Combustion System
Double Combustion Chamber
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



FRONT WOOD STOVE WITH OVEN AND PLATE WARMER M-107 C



9,5 - 12 kW



81 %



0,08 %



35 mg/Nm³



65 cm



ø 150 mm



260 m³



121 Kg



648 x 496 x 1004 mm
Width x Depth x Height



Black
Finish



Datasheet

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Male Cast Iron Flue Outlet


Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 450 x 350 x 60 mm
Stainless Steel Oven Grill 450 x 350 mm
2 cooking plates ø 125 : 200 mm

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



FRONT WOOD STOVE WITH OVEN M-104



11 - 15 kW



82 %



0,11 %



20,68 mg/Nm³



50 cm



ø 150 mm



305 m³



93 Kg



571 x 460 x 1015 mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 320 x 220 x 48 mm
Male Cast Iron Flue Outlet
Double Combustion Chamber

ACCESSORIES/ ADD-ONS *(See pages 131-133)*


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



FRONT WOOD STOVE WITH OVEN M-106



9,5 - 12 kW



81 %



0,08 %



35 mg/Nm³



65 cm



ø 200 mm



260 m³



140 Kg



745 x 505 x 1166 mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 450 x 350 x 60 mm
Stainless Steel Oven Grill 450 x 350 mm
Male Cast Iron Flue Outlet
Double Combustion Chamber

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 2 Iron Casts for the Combustion Chamber
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



FRONT WOOD STOVE WITH OVEN AND TANGENTIAL TURBINE



KW

9,5 - 12 kW

%

81 %

0,08 %

35 mg/Nm³

65 cm

ø 200 mm

260 m³

146 Kg

712 x 547 x 1164 mm

Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 500 x 350 x 60 mm
Stainless Steel Oven Grill 500 x 350 mm
Male Cast Iron Flue Outlet
Double Combustion Chamber

M-107 Without Turbine

ACCESSORIES/ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 2 Iron Casts for the Combustion Chamber
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)


M-107 T With Turbine OFF Mode when Switch in Position 0



Datasheet



CORNER WOOD STOVE WITH OVEN M-105 H



11 - 15 kW



82 %



0,11 %



20,68 mg/Nm³



50 cm



ø 150 mm



305 m³



105 Kg



774 x 539 x 1000 mm
Width x Depth x Height

**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Double Combustion Chamber
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 320 x 220 x 48 mm
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



CORNER WOOD STOVE WITH OVEN M-106 R



KW

9,5 - 12 kW

%

81 %



0,08 %



35 mg/Nm³



65 cm



ø 200 mm



260 m³



160 Kg



1100 x 755 x 1161 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 450 x 350 x 60 mm
Stainless Steel Oven Grill 450 x 350 mm
Male Cast Iron Flue Outlet
Double Combustion Chamber


ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 2 Iron Casts for the Combustion Chamber
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



CORNER WOOD STOVE WITH OVEN AND TANGENTIAL TURBINE M-107 RT



KW

9,5 - 12 kW

%

81 %

III

0,08 %

mg/Nm³

35 mg/Nm³

cm

65 cm

mm

ø 200 mm

m³

260 m³

KG

186 Kg

mm

1118 x 641 x 1164 mm
Width x Depth x Height

NEW

**Black
Finish**

NEW

Constructed from Steel up to 4 mm thick

Removable Ash Drawer

Vermiculite Interior

Double Combustion System

Double Combustion Chamber

Equipped with Cast Iron Doors and Grate

Stainless Steel Oven Tray 500 x 350 x 60 mm

Stainless Steel Oven Grill 500 x 350 mm

Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Set of 2 Iron Casts for the Combustion Chamber

Drip-Proof Sleeve ø 200 mm. Vitrified Black

Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



BASIC WOOD STOVES

gama

Wood-burning stoves with oven offer a rich and authentic way of cooking, bringing a traditional and natural essence to food while preserving its true flavor.




CH





FRONT WOOD STOVE WITH LOG HOLDER CH-0



11 - 15 kW



74 %



0,09 %



39 mg/Nm³



55 cm



ø 150 mm



305 m³



67 Kg



598 x 398 x 813 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion System

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



FRONT WOOD STOVE WITH LOG HOLDER AND PLATE WARMER CH-1



KW

11-15 kW

%

74 %



0,09 %



39 mg/Nm³



55 cm



ø 150 mm



305 m³



72 Kg



608 x 434 x 789 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion System
Rear Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black



Datasheet



CORNER WOOD STOVE CH-5



KW

11 - 15 kW

%

74 %



0,09 %



39 mg/Nm³



55 cm



ø 150 mm



305 m³



69 Kg



818 x 513 x 811 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion System


ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



FRONT WOOD STOVE WITH CLOSED OVEN CH-3



KW

11 - 15 kW

%

74 %



0,09 %



39 mg/Nm³



55 cm



ø 150 mm



305 m³



90 Kg



608 x 433 x 959 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick

Cast Iron Door and Grate

Removable Ash Drawer

Double Combustion System

Rear Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Drip-Proof Sleeve ø 150 mm. Vitrified Black


Stainless Steel Oven Tray 320 x 220 x 48 mm



Datasheet



FRONT WOOD STOVE WITH CLOSED OVEN CH-4



KW

9,5 - 12 kW

%

81 %



0,08 %



35 mg/Nm³



65 cm



ø 150 mm



260 m³



110 Kg



665 x 446 x 1120 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate


ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Stainless Steel Oven Tray 320 x 220 x 48 mm



Datasheet



FRONT WOOD STOVE WITH STAINLESS STEEL CLOSED OVEN CH-8



9,5 - 12 kW



81 %



0,08 %



35 mg/Nm³



65 cm



ø 150 mm



260 m³



128 Kg



650 x 495 x 1136 mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 450 x 350 x 60 mm
Stainless Steel Oven Grill 450 x 350 mm
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



FRONT WOOD STOVE WITH STAINLESS STEEL CLOSED OVEN CH-9



KW

11 - 13,5 kW

%

82 %



0,12 %



32,84 mg/Nm³



75 cm



ø 200 mm



295 m³



149 Kg



787 x 552 x 1123 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 600 x 400 x 60 mm
Stainless Steel Oven Grill 600 x 400 mm
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Steel Log Holder - 492 x 760 x 508 mm (Height/Width/Depth)



Datasheet



CORNER WOOD OVEN WITH CLOSED OVEN CH-5 H



11 - 15 kW



74 %



0,09 %



39 mg/Nm³



55 cm



ø 150 mm



305 m³



93 Kg



818 x 513 x 1017 mm
Width x Depth x Height

**Black
Finish**

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion System

ACCESSORIES/ ADD-ONS (See pages 131-133)


Stainless Steel Oven Tray 320 x 220 x 48 mm
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



CORNER WOOD STOVE WITH CLOSED OVEN CH-4 R



9,5 - 12 kW



81 %



0,08 %



35 mg/Nm³



65 cm



ø 150 mm



260 m³



116 Kg



996 x 643 x 1115 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate

ACCESSORIES/ ADD-ONS (See pages 131-133)


Stainless Steel Oven Tray
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



CORNER WOOD STOVE WITH STAINLESS STEEL CLOSED OVEN CH-8 R



9,5 - 12 kW



81 %



0,08 %



35 mg/Nm³



65 cm



ø 150 mm



260 m³



128 Kg



996 x 630 x 1121 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and
Grate Stainless Steel Oven Tray 450 x 350 x 60 mm
Stainless Steel Oven Grill 450 x 350 mm
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



CORNER WOOD STOVE WITH STAINLESS STEEL CLOSED OVEN CH-9 R



11 - 13,5 kW



82 %



0,12 %



32,84 mg/Nm³



75 cm



ø 200 mm



295 m³



200 Kg



1183 x 737 x 1123 mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 600 x 400 x 60 mm
Stainless Steel Oven Grill 600 x 400 mm
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Steel Log Holder - 503 x 1240 x 800 mm (Height/Width/Depth)



Datasheet



fm
WOOD OVENS

gama
HL





FRONT STAINLESS STEEL WRAP AROUND WOOD OVEN WITH AN OVEN TRAY OF 50 MM



KW

9,5 - 12 kW

%

81 %

%

0,08 %

mg/Nm³

35 mg/Nm³

cm

65 cm

mm

ø 200 mm

m³

260 m³

KG

145 Kg

mm

814 x 520 x 1059 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 500 x 350 x 60 mm
Stainless Steel Oven Grill 500 x 350 mm
Double Combustion Chamber
Male Cast Iron Flue Outlet

HL-100 Vermiculite Interior

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Steel Log Holder - 375 x 815 x 495 mm (Height/Width/Depth)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)


HL-100 F Cast Iron Interior



Datasheet



FRONT STAINLESS STEEL WRAP AROUND WOOD OVEN WITH AN OVEN TRAY OF 60 MM



11 - 13,5 kW



82 %



0,12 %



32,84 mg/Nm³



75 cm



ø 200 mm



295 m³



175 Kg



1005 x 550 x 1163 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 600 x 400 x 60 mm
Stainless Steel Oven Grill 600 x 400 mm
Double Combustion Chamber
Male Cast Iron Flue Outlet

HL-200 Vermiculite Interior

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Steel Log Holder - 478 x 1003 x 530 mm. (Height/Width/Depth)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)


HL-200 F Cast Iron Interior



Datasheet



CORNER STAINLESS STEEL WRAP AROUND WOOD OVEN WITH AN OVEN TRAY OF 50 MM



KW

9,5 - 12 kW

%

81 %

0,08 %

35 mg/Nm³

65 cm

ø 200 mm

260 m³

160 Kg

1101 x 772 x 1059 mm

Width x Depth x Height

**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 500 x 350 x 60 mm
Stainless Steel Oven Grill 500 x 350 mm
Double Combustion Chamber
Male Cast Iron Flue Outlet

HL-100 R Vermiculite Interior

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Steel Log Holder - 372 x 1110 x 773 mm. (Height/Width/Depth)

Drip-Proof Sleeve ø 200 mm. Vitrified Black

Wall Protection Steel Plate 900 x 705 mm (Black Color)


HL-100 RF Cast Iron Interior



Datasheet



CORNER STAINLESS STEEL WRAP AROUND WOOD OVEN WITH AN OVEN TRAY OF 60 MM



11 - 13,5 kW



82 %



0,12 %



32,84 mg/Nm³



75 cm



ø 200 mm



295 m³



195 Kg



1285 x 881 x 1157 mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 600 x 400 x 60 mm
Stainless Steel Oven Grill 600 x 400 mm
Double Combustion Chamber
Male Cast Iron Flue Outlet

HL-200 R Vermiculite Interior

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Steel Log Holder - 375 x 1293 x 882 mm. (Height/Width/Depth)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)




Datasheet

HL-200 RF Cast Iron Interior





BUILT-WRAP AROUND WOOD OVEN WITH AN OVEN TRAY OF 50 CM



KW

9,5 - 12 kW

%

81 %



0,08 %



35 mg/Nm³



65 cm



ø 200 mm



260 m³



115 Kg



1105 x 792 mm
Height x Width



615 x 392 x 1050 mm
Width x Depth x Height



**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 500 x 350 x 60 mm
Stainless Steel Oven Grill 500 x 350 mm
Male Cast Iron Flue Outlet

HLI-100 Vermiculite Interior

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Drip-Proof Sleeve ø 200 mm. Vitrified Black


HLI-100 F Cast Iron Interior



Datasheet



BUILT-WRAP AROUND WOOD OVEN WITH AN OVEN TRAY OF 60 CM



11 - 13,5 kW



82 %



0,12 %



32,84 mg/Nm³



75 cm



ø 200 mm



295 m³



162 Kg



1236 x 971 mm
Height x Width



738 x 451 x 1091 mm
Width x Depth x Height



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 600 x 400 x 60 mm
Stainless Steel Oven Grill 600 x 400 mm
Male Cast Iron Flue Outlet

HLI-200 Vermiculite Interior

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Drip-Proof Sleeve ø 200 mm. Vitrified Black

HLI-200 F Cast Iron Interior



Datasheet



METAL FIREPLACES

gama


*Metal wood-burning fireplaces are
beautifully decorative elements that
perfectly combine with the timeless charm
of watching the flames directly — an
ancestral, comforting, and welcoming
attraction that few can resist.*







FRONTAL METAL FIREPLACE WITH A DUCTABLE TANGENTIAL TURBINE



KW

11 - 14 KW

%

79 %

0,10 %

29,58 mg/Nm³

62 cm

ø 200 mm

295 m³

105 Kg

741 x 500 x (2400:2900) mm

Width x Depth x Height



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Cast Iron Door and Grate
Double Combustion System
Tangential Turbine 265 m³/h and 43 KW
Turbine in OFF Mode with Switch in Position 0

C-300 Without Turbine and Vermiculite

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Analog Fan Speed Controller


C-300 TFK With Turbine, Cast Iron and Silk-screened Glass



Datasheet



3-SIDED FRONTAL METAL FIREPLACE WITH A DUCTABLE TANGENTIAL TURBINE



11 - 14 KW



79 %



0,10 %



29,58 mg/Nm³



62 cm



ø 200 mm



295 m³



105 Kg



741 x 500 x (2400:2900) mm
Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Cast Iron Door and Grate
Double Combustion System
Tangential Turbine 265 m³/h and 43 KW
Turbine in OFF Mode with Switch in Position 0

C-303 Without Turbine and Vermiculite

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)
Analog Fan Speed Controller


C-303 TFK With Turbine, Cast Iron and Silk-screened Glass on Door



Datasheet



FRONTAL METAL FIREPLACE



KW

14 - 17,5 KW

%

79 %

%

0,12 %

mg/Nm³

33,34 mg/Nm³

cm

75 cm

mm

ø 250 mm

m³

373 m³

KG

155 Kg

mm

919 x 571 x (2400:2900) mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Cast Iron Door and Grate
Double Combustion System

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 4 Cast Iron Plates for the Combustion Chamber
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 250 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)




Datasheet

C-200 Vermiculite Interior

C-200 K Vermiculite Interior and Silk-screened Glass



3-SIDED FRONTAL METAL FIREPLACE



14 - 17,5 KW



79 %



0,12 %



33,34 mg/Nm³



75 cm



ø 250 mm



373 m³



153 Kg



919 x 571 x (2400:2900) mm
Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Cast Iron Door and Grate
Double Combustion System

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 2 Iron Casts for the Combustion Chamber
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 250 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet


C-203 Vermiculite Interior

C-203 K Vermiculite Interior and Silk-screened Glass on the Door





CORNER METAL FIREPLACE WITH RIGHT GLASS PANEL



KW

11 - 14 KW

%

79 %

0,10 %

29,58 mg/Nm³

62 cm

ø 200 mm

295 m³

132 Kg

745 x 495 x (2400:2900) mm

Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Cast Iron Door and Grate
Double Combustion System

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 3 Cast Iron Plates for the Combustion Chamber
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)




Datasheet

C-302 D Vermiculite Interior

C-302 DK Vermiculite Interior and Silk-screened Glass on the Door



CORNER METAL FIREPLACE WITH LEFT GLASS PANEL



11 - 14 KW



79 %



0,10 %



29,58 mg/Nm³



62 cm



ø 200 mm



295 m³



132 Kg



745 x 495 x (2400-2900) mm
Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick

Removable Ash Drawer

Cast Iron Door and Grate

Double Combustion System

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Set of 3 Cast Iron Plates for the Combustion Chamber

Custom Frame (Price per meter from 2.40 meters Height)

Drip-Proof Sleeve ø 200 mm. Vitrified Black

Wall Protection Steel Plate 900 x 705 mm (Black Color)




C-302 I Vermiculite Interior

C-302 IK Vermiculite Interior and Silk-screened Glass on the Door





CORNER METAL FIREPLACE



KW

11 - 14 KW

%

79 %



0,10 %



29,58 mg/Nm³



62 cm



ø 200 mm



295 m³



132 Kg



1020 x 648 x (2400:2900) mm
Width x Depth x Height

**Black
Finish**



Equipped with Cast Iron Door and Grate
Double Combustion System
Constructed from Steel up to 4 mm thick
Removable Ash Drawer

ACCESSORIES/ ADD-ONS (See pages 131-133)

Set of 4 Cast Iron Plates for the Combustion Chamber
800°C Heatproof Spray Paint 375 ml. (Black Color)
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)




Datasheet

C-300 R Vermiculite Interior

C-300 RK Vermiculite Interior and Silk-screened Glass



CORNER METAL FIREPLACE



14 - 17,5 KW



79 %



0,12 %



33,34 mg/Nm³



75 cm



ø 250 mm



373 m³



160 Kg



1242 x 722 x (2400:2900) mm
Width x Depth x Height



Black
Finish

Equipped with Cast Iron Door and Grate
Double Combustion System
Constructed from Steel up to 4 mm thick
Removable Ash Drawer

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 4 Cast Iron Plates for the Combustion Chamber
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 250 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet


C-200 R Vermiculite Interior

C-200 RK Vermiculite Interior and Silk-screened Glass





CENTRAL METAL FIREPLACE WITH 1 DOOR



KW

11 - 14 KW

%

79 %

0,10 %

29,58 mg/Nm³

62 cm

ø 200 mm

295 m³

135 Kg

825 x 569 x (2400:2900) mm

Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Cast Iron Door and Grate

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Custom Frame (Price per meter from 2.40 meters Height)

Drip-Proof Sleeve ø 200 mm. Vitrified Black




Datasheet

C-104 Without Silk-screened Glass

C-104 K With Silk-screened Glass on the Door



CENTRAL METAL FIREPLACE WITH 2 DOORS



14 - 17,5 KW



79 %



0,12 %



33,34 mg/Nm³



75 cm



ø 250 mm



373 m³



166 Kg



925 x 833 x (2400-2900) mm
Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Equipped with Cast Iron Doors and Grate

ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 200 mm. Vitrified Black



Datasheet


C-204 Without Silk-screened Glass

C-204 K With Silk-screened Glass on the Door





FRONTAL METAL FIREPLACE WITH STAINLESS STEEL OVEN WITH A TRAY OF 50 CM. C-300 H



KW

11 - 14 KW

%

79 %

0,10 %

29,58 mg/Nm³

62 cm

ø 200 mm

295 m³

150 Kg

825 x 551 x (2400:2900) mm

Width x Depth x Height

Black
Finish



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 500 x 350 x 60 mm
Stainless Steel Oven Grill 500 x 350 mm

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 4 Cast Iron Plates for the Combustion Chamber
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



FRONTAL METAL FIREPLACE WITH STAINLESS STEEL OVEN WITH A TRAY OF 60 CM. C-200 H



14 - 17,5 KW



79 %



0,12 %



33,34 mg/Nm³



75 cm



ø 250 mm



373 m³



180 Kg



950 x 587 x (2400-2900) mm
Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick

Removable Ash Drawer

Vermiculite Interior

Double Combustion System

Equipped with Cast Iron Doors and Grate

Stainless Steel Oven Tray 600 x 400 x 60 mm

Stainless Steel Oven Grill 600 x 400 mm

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Set of 4 Cast Iron Plates for the Combustion Chamber

Custom Frame (Price per meter from 2.40 meters Height)

Drip-Proof Sleeve ø 250 mm. Vitrified Black


Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



CORNER METAL FIREPLACE WITH STAINLESS STEEL OVEN WITH A TRAY OF 50 CM. C-300 RH



KW

11 - 14 KW

%

79 %

0,10 %

29,58 mg/Nm³

62 cm

ø 200 mm

295 m³

150 Kg

1020 x 648 x (2400:2900) mm

Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 500 x 350 x 60 mm
Stainless Steel Oven Grill 500 x 350 mm

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 4 Cast Iron Plates for the Combustion Chamber
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



CORNER METAL FIREPLACE WITH STAINLESS STEEL OVEN WITH A TRAY OF 60 CM. C-200 RH



14 - 17,5 KW



79 %



0,12 %



33,34 mg/Nm³



75 cm



ø 250 mm



373 m³



192 Kg



1242 x 722 x (2400:2900) mm
Width x Depth x Height



Black
Finish

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Double Combustion System
Equipped with Cast Iron Doors and Grate
Stainless Steel Oven Tray 600 x 400 x 60 mm
Stainless Steel Oven Grill 600 x 400 mm

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 4 Cast Iron Plates for the Combustion Chamber
Custom Frame (Price per meter from 2.40 meters Height)
Drip-Proof Sleeve ø 250 mm. Vitrified Black
Wall Protection Steel Plate 900 x 705 mm (Black Color)



Datasheet



WOOD INSERT

gama



The combustion system of FM's wood-burning fireplace inserts ensures efficient operation by using less firewood while delivering more heat.

PANORÁMICOS



IC-100 FKC

100CM. PANORAMIC WOOD INSERT WITH HOOD AND DUCTABLE CENTRIFUGAL TURBINE

Constructed from Steel up to 5 mm thick
External Air Intake Option
Double Combustion System
Triple Combustion System
Clean Glass System
Log Loading Dimensions (WxHxD): 830 x 320 x 365 mm
Male Cast Iron Flue Outlet Ø 200 mm
Silk-screened Glass 750°C
Cast Iron Door and Grate
Double Combustion Chamber

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
2 Ø 80 mm Nozzles for Primary Air Ducting



SPECIAL FINISH- SILK-SCREENED GLASS

ROBAX® NightFlame


Elegant – with or without fire



Datasheet

**New Turbine System extracting Air from
inside the Combustion Chamber**





Black
Finish



Height x Width (mm) Width x Depth x Height (mm)

IC-100 FKC 14,5-17,9kW 81 % 0,10 % 30,80mg/Nm³ 88 cm ø 200 mm 390 m³ 200 Kg 594 x 994 941 x 450 x (1290:1442)



100 CM PANORAMIC WOOD INSERT - DUCTABLE

Constructed from Steel up to 5 mm thick
External Air Intake Option
Double Combustion System
Triple Combustion System
Clean Glass System
Log Loading Dimensions (WxHxD): 830 x 320 x 365 mm
Male Cast Iron Flue Outlet Ø 200
Silk-screened Glass 750°C
Cast Iron Door and Grate
Double Combustion Chamber

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
2 Ø 80 mm Nozzles for Primary Air Ducting



SPECIAL FINISH- SILK-SCREENED GLASS

ROBAX® NightFlame



Elegant – with or without fire

**New Turbine System extracting Air from
inside the Combustion Chamber**



Height x Width (mm) Width x Depth x Height (mm)

IZ-100 K	14,5-17,9 kW	81 %	0,10 %	30,80mg/Nm³	88 cm	ø 200 mm	390 m³	185 Kg	594 x 994	934 x 524 x 563
IZ-100 FKT	14,5-17,9 kW	81 %	0,10 %	30,80mg/Nm³	88 cm	ø 200 mm	390 m³	200 Kg	594 x 994	934 x 524 x (777:929)
IZ-100 FKC	14,5-17,9 kW	81 %	0,10 %	30,80mg/Nm³	88 cm	ø 200 mm	390 m³	200 Kg	594 x 994	934 x 524 x (777:929)

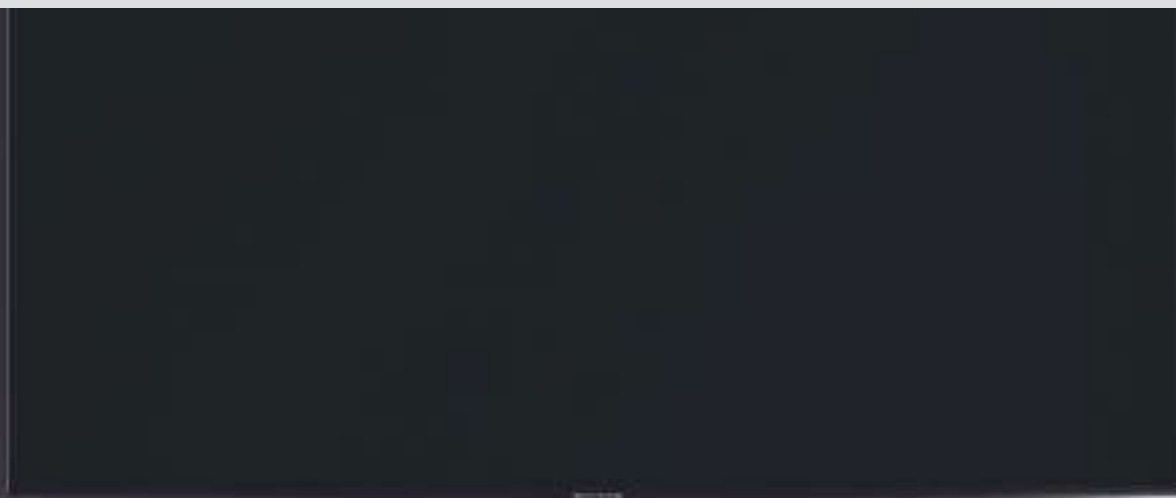

Datasheet

IZ-100 K

*Vermiculite Interior
Without Fans*



Datasheet

IZ-100 FKT

*Cast Iron Interior
Tangential Turbine*



Datasheet

IZ-100 FKC

*Cast Iron Interior
Centrifugal Turbine*



WOOD INSERT

gama




Wood-burning inserts fit perfectly into existing empty fireplaces or their original spaces, preserving the decorative ambience of your home.

IT





70 CM WOOD INSERT WITHOUT FANS I-170



12,5 - 17 kW



81 %



0,12 %



18,04 mg/Nm³



62 cm



ø 150 mm



335 m³



78 Kg



538 x 715 mm
Height x Width



658 x 461 x 518 mm
Width x Depth x Height



**Black
Finish**

Available October 2025

NEW DESIGN

Constructed from Steel up to 4 mm thick

Removable Ash Drawer

Vermiculite Interior

Cast Iron Door and Grate

Double Combustion System

Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Set of 4 Cast Iron Plates for the Combustion Chamber

Drip-Proof Sleeve ø 150 mm. Vitrified Black

2 Ø 80 mm Nozzles for Primary Air Ducting


Support Frame with Adjustable Legs



Datasheet



70 CM WOOD INSERT WITH FANS



KW

12,5 - 17 kW

%

81 %

III

0,12 %

•••••

18,04 mg/Nm³

62 cm

Ø 150 mm

m³

335 m³

KG

88 Kg



578 x 715 mm
Height x Width ra



658 x 482 x 552 mm
Width x Depth x Height



IT-170
Vermiculite Interior



IT-170 K
*Cast Iron Interior
Silk-screened Glass 750°C*



IT-170 F
Cast Iron Interior



IT-170 FK
*Cast Iron Interior
Silk-screened Glass 750°C*

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
New Electronic System with 3 Speeds
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve Ø 150 mm. Vitrified Black
2 Ø 80 mm Nozzles for Primary Air Ducting
Support Frame with Adjustable Legs



Datasheet



70 CM LEFT CORNER WOOD INSERT WITH FANS



KW

12,5 - 17 kW

%

81 %

0,12 %

18,04 mg/Nm³

62 cm

ø 150 mm

335 m³

92 Kg

558 x 661 mm

Height x Width

639 x 448 x 552 mm

Width x Depth x Height



Available October 2025

Black
Finish

NEW DESIGN



New Door Opening System



IT-172 IK
Vermiculite Interior
Silk-screened Glass 750°C



IT-172 IFK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans 160 m³/h and 20 W
New Electronic System with 3 Speeds
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
2 Ø 80 mm Nozzles for Primary Air Ducting
Support Frame with Adjustable Legs



Datasheet



70 CM RIGHT CORNER WOOD INSERT WITH FANS



12,5 - 17 kW



81 %



0,12 %



18,04 mg/Nm³



62 cm



ø 150 mm



335 m³



92 Kg



558 x 661 mm
Height x Width



639x 448 x 552 mm
Width x Depth x Height



Available October 2025

Black
Finish

NEW DESIGN



New Door Opening System



IT-172 DK
Vermiculite Interior
Silk-screened Glass 750°C



IT-172 DFK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
New Electronic System with 3 Speeds
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
2 Ø 80 mm Nozzles for Primary Air Ducting
Support Frame with Adjustable Legs



Datasheet



70 CM 2-SIDED WOOD INSERT WITH FANS



12,5 - 17 KW



81 %



0,12 %



18,04 mg/Nm³



62 cm



ø 150 mm



335 m³



103 Kg



558 x 715 mm
Height x Width



658 x 513 x 551 mm
Width x Depth x Height



Available October 2025

Black
Finish

NEW DESIGN



IT-172 K
Vermiculite Interior
Silk-screened Glass 750°C



IT-172 FK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
New Electronic System with 3 Speeds
Safety Thermostat Set to Position 0
Equipped with Cast Iron Doors and Grate
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Support Frame with Adjustable Legs



Datasheet



70 CM 3-SIDED WOOD INSERT WITH FANS



KW

12,5 - 17 KW

%

81 %

0,12 %

0,12 %

18,04 mg/Nm³

18,04 mg/Nm³

62 cm

62 cm

ø 150 mm

ø 150 mm

335 m³

335 m³

84 Kg

84 Kg

545 x 719 mm

545 x 719 mm
Height x Width

717 x 487 x 545 mm

717 x 487 x 545 mm
Width x Depth x Height



Black
Finish



IT-173 K
Vermiculite Interior
Silk-screened Glass 750°C



IT-173 FK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Analog Fan Speed Controller



Datasheet



80 CM WOOD INSERT WITHOUT FANS I-180



13 - 18 KW



81 %



0,07 %



35,65 mg/Nm³



75 cm



ø 200 mm



340 m³



93 Kg



645 x 873 mm
Height x Width



733 x 451 x 593 mm
Width x Depth x Height



**Black
Finish**

Constructed from Steel up to 4 mm thick

Removable Ash Drawer

Vermiculite Interior

Cast Iron Door and Grate

Double Combustion System

Double Combustion Chamber

Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Set of 4 Cast Iron Plates for the Combustion Chamber

Drip-Proof Sleeve ø 200 mm. Vitrified Black


Set of 2 Axial Fans with Electronic Control and Safety Thermostat



Datasheet



80 CM WOOD INSERT WITH FANS



KW

13 - 18 KW

%

81 %

0,07 %

35,65 mg/Nm³

75 cm


ø 200 mm

340 m³

100 Kg

645 x 873 mm
Height x Width

733 x 451 x 593 mm
Width x Depth x Height

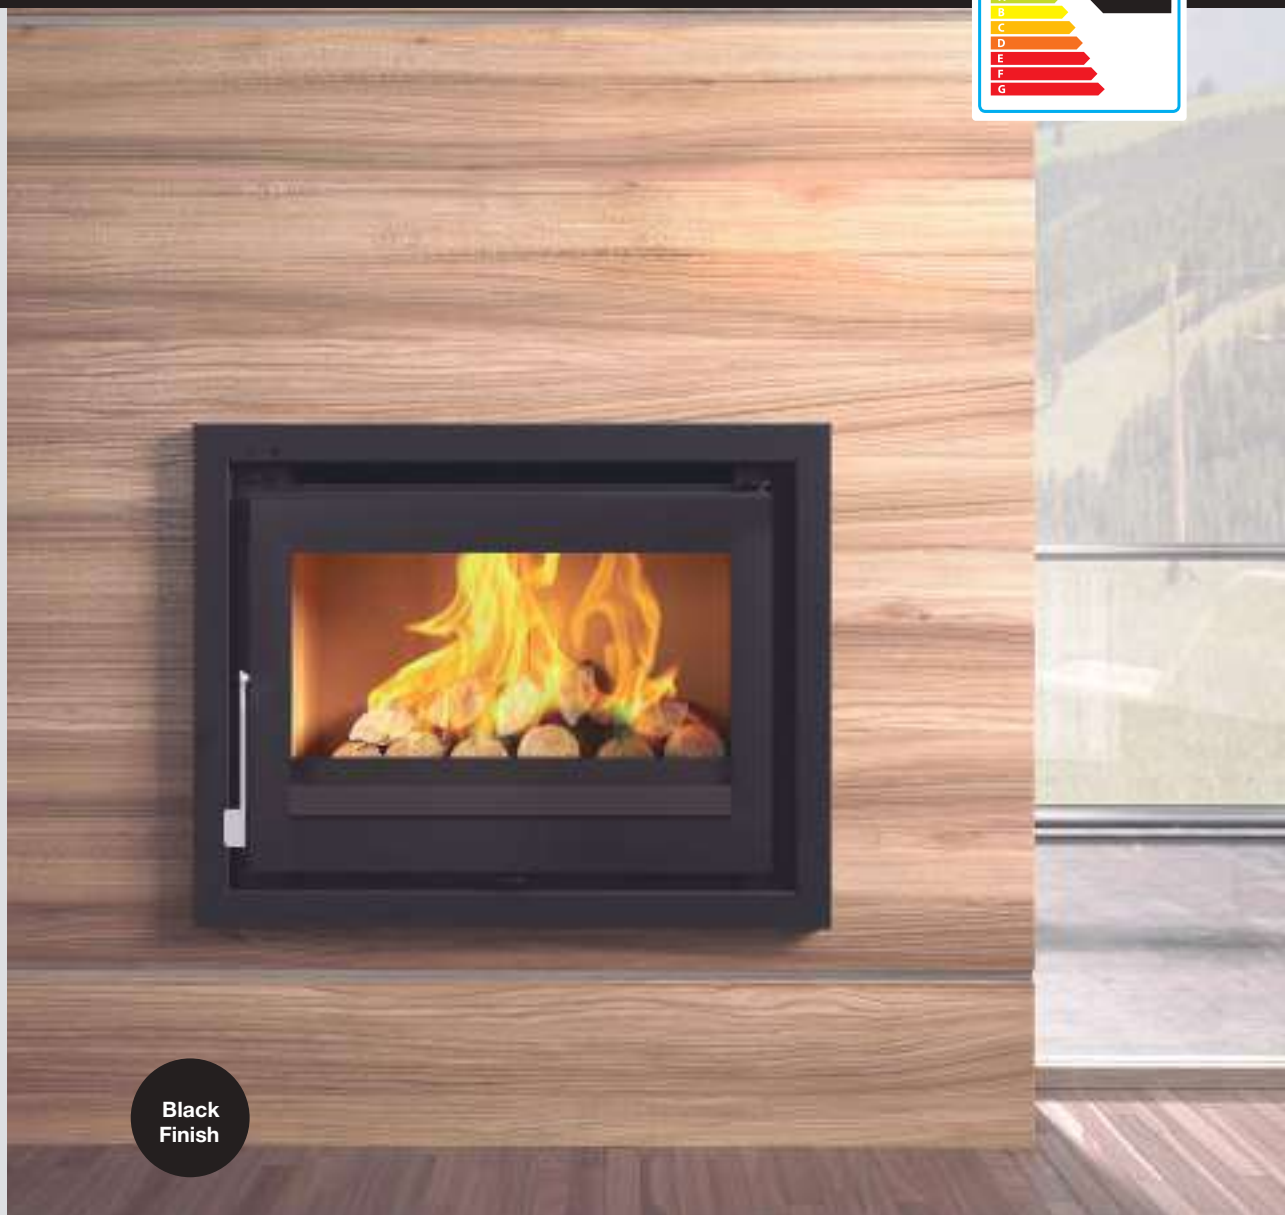

Black
Finish



IT-180
Vermiculite Interior



IT-180 K
Vermiculite Interior
Silk-screened Glass 750°C



IT-180 F
Cast Iron Interior



IT-180 FK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black Analog
Fan Speed Controller



Datasheet



80 CM LEFT CORNER WOOD INSERT WITH FANS



KW

13 - 18 KW

%

81 %

%

0,07 %

mg/Nm³

35,65 mg/Nm³

cm

75 cm

mm

ø 200 mm

m³

340 m³

KG

102 Kg

mm

600 x 817 mm
Height x Width

mm

789 x 487 x 600 mm
Width x Depth x Height



**Black
Finish**



IT-182 IK
Vermiculite Interior
Silk-screened Glass 750°C



IT-182 IFK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet


ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Analog Fan Speed Controller



Datasheet



80 CM RIGHT CORNER WOOD INSERT WITH FANS



13 - 18 kW



81 %



0,07 %



35,65 mg/Nm³



75 cm



ø 200 mm



340 m³



102 Kg



600 x 817 mm
Height x Width



789 x 487 x 600 mm
Width x Depth x Height



**Black
Finish**



IT-182 DK
Vermiculite Interior
Silk-screened Glass 750°C



IT-182 DFK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)


800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Analog Fan Speed Controller



Datasheet



80 CM 2-SIDED WOOD INSERT WITH FANS



13 - 18 KW



81 %



0,07 %



35,65 mg/Nm³



75 cm



ø 200 mm



340 m³



115 Kg



635 x 875 mm
Height x Width



768 x 420 x 612,5 mm
Width x Depth x Height



**Black
Finish**



IT-182 K
Vermiculite Interior
Silk-screened Glass 750°C



IT-182 FK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Drip-Proof Sleeve ø 200 mm. Vitrified Black


Analog Fan Speed Controller



Datasheet



80 CM 3-SIDED WOOD INSERT WITH FANS



13 - 18 KW



81 %



0,07 %



35,65 mg/Nm³



75 cm



ø 200 mm



340 m³



104 Kg



600 x 819 mm
Height x Width



817 x 487 x 600 mm
Width x Depth x Height



**Black
Finish**



IT-183 K
Vermiculite Interior
Silk-screened Glass 750°C



IT-183 FK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet


ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Analog Fan Speed Controller



Datasheet



100 CM WOOD INSERT WITH FANS



KW

13,5 - 19 KW

%

81 %

0,10 %

30,10 mg/Nm³

95 cm

ø 200 mm

360 m³

130 Kg

645 x 1045 mm

Height x Width

903 x 452 x 597 mm

Width x Depth x Height



Black
Finish



IT-100
Vermiculite Interior



IT-100 K
Vermiculite Interior
Silk-screened Glass 750°C



IT-100 F
Cast Iron Interior



IT-100 FK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Four Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Analog Fan Speed Controller

SPECIAL FINISH- SILK-SCREENED GLASS

ROBAX® NightFlame


Elegant – with or without fire



Datasheet



100 CM LEFT CORNER WOOD INSERT



13,5 - 19 KW



81 %



0,10 %



30,10 mg/Nm³



95 cm



ø 200 mm



360 m³



134 Kg



600 x 1001 mm
Height x Width



963 x 487 x 597 mm
Width x Depth x Height



**Black
Finish**



IT-122 DK
Vermiculite Interior
Silk-screened Glass 750°C



IT-122 DFK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Four Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)
800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Analog Fan Speed Controller

SPECIAL FINISH- SILK-SCREENED GLASS
ROBAX® NightFlame


Elegant – with or without fire



Datasheet



100 CM RIGHT CORNER WOOD INSERT



KW

13,5 - 19 KW

%

81 %

III

0,10 %

mg/Nm³

30,10 mg/Nm³

cm

95 cm

mm

ø 200 mm

m³

360 m³

KG

134 Kg

mm

600 x 1001 mm
Height x Width

mm

963 x 487 x 597 mm
Width x Depth x Height



Black
Finish



IT-122 IK
Vermiculite Interior
Silk-screened Glass 750°C



IT-122 IFK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Four Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Analog Fan Speed Controller

SPECIAL FINISH- SILK-SCREENED GLASS ROBAX® NightFlame


Elegant – with or without fire



Datasheet



100 CM 2-SIDED WOOD INSERT



13,5 - 19 KW



81 %



0,10 %



30,10 mg/Nm³



95 cm



ø 200 mm



360 m³



140 Kg



645 x 1045 mm
Height x Width



934 x 417 x 610 mm
Width x Depth x Height



**Black
Finish**



IT-102 K
Vermiculite Interior
Silk-screened Glass 750°C



IT-102 FK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Doors and Grate
Removable Ash Drawer
Double Combustion Chamber
Four Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 200 mm. Vitrified Black
Analog Fan Speed Controller

SPECIAL FINISH- SILK-SCREENED GLASS ROBAX® NightFlame


Elegant – with or without fire



Datasheet



100 CM 3-SIDED WOOD INSERT



KW

13,5 - 19 KW

%

81 %

0,10 %

30,10 mg/Nm³

95 cm

ø 200 mm

360 m³

134 Kg

600 x 1001 mm

Height x Width

997 x 487 x 600 mm

Width x Depth x Height



Black
Finish



IT-103 K
Vermiculite Interior
Silk-screened Glass 750°C



IT-103 FK
Cast Iron Interior
Silk-screened Glass 750°C

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Four Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Double Combustion System
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)

Drip-Proof Sleeve ø 200 mm. Vitrified Black

Analog Fan Speed Controller

SPECIAL FINISH- SILK-SCREENED GLASS
ROBAX® NightFlame


Elegant – with or without fire



Datasheet



165 CM WOOD FIRED INSERT WITH FANS



12,6-17 KW



81 %



0,09 %



33,53 mg/Nm³



62 cm



ø 150 mm



335 m³




68 Kg



568 x 727 mm
Height x Width



624 x 392 x 530 mm
Width x Depth x Height

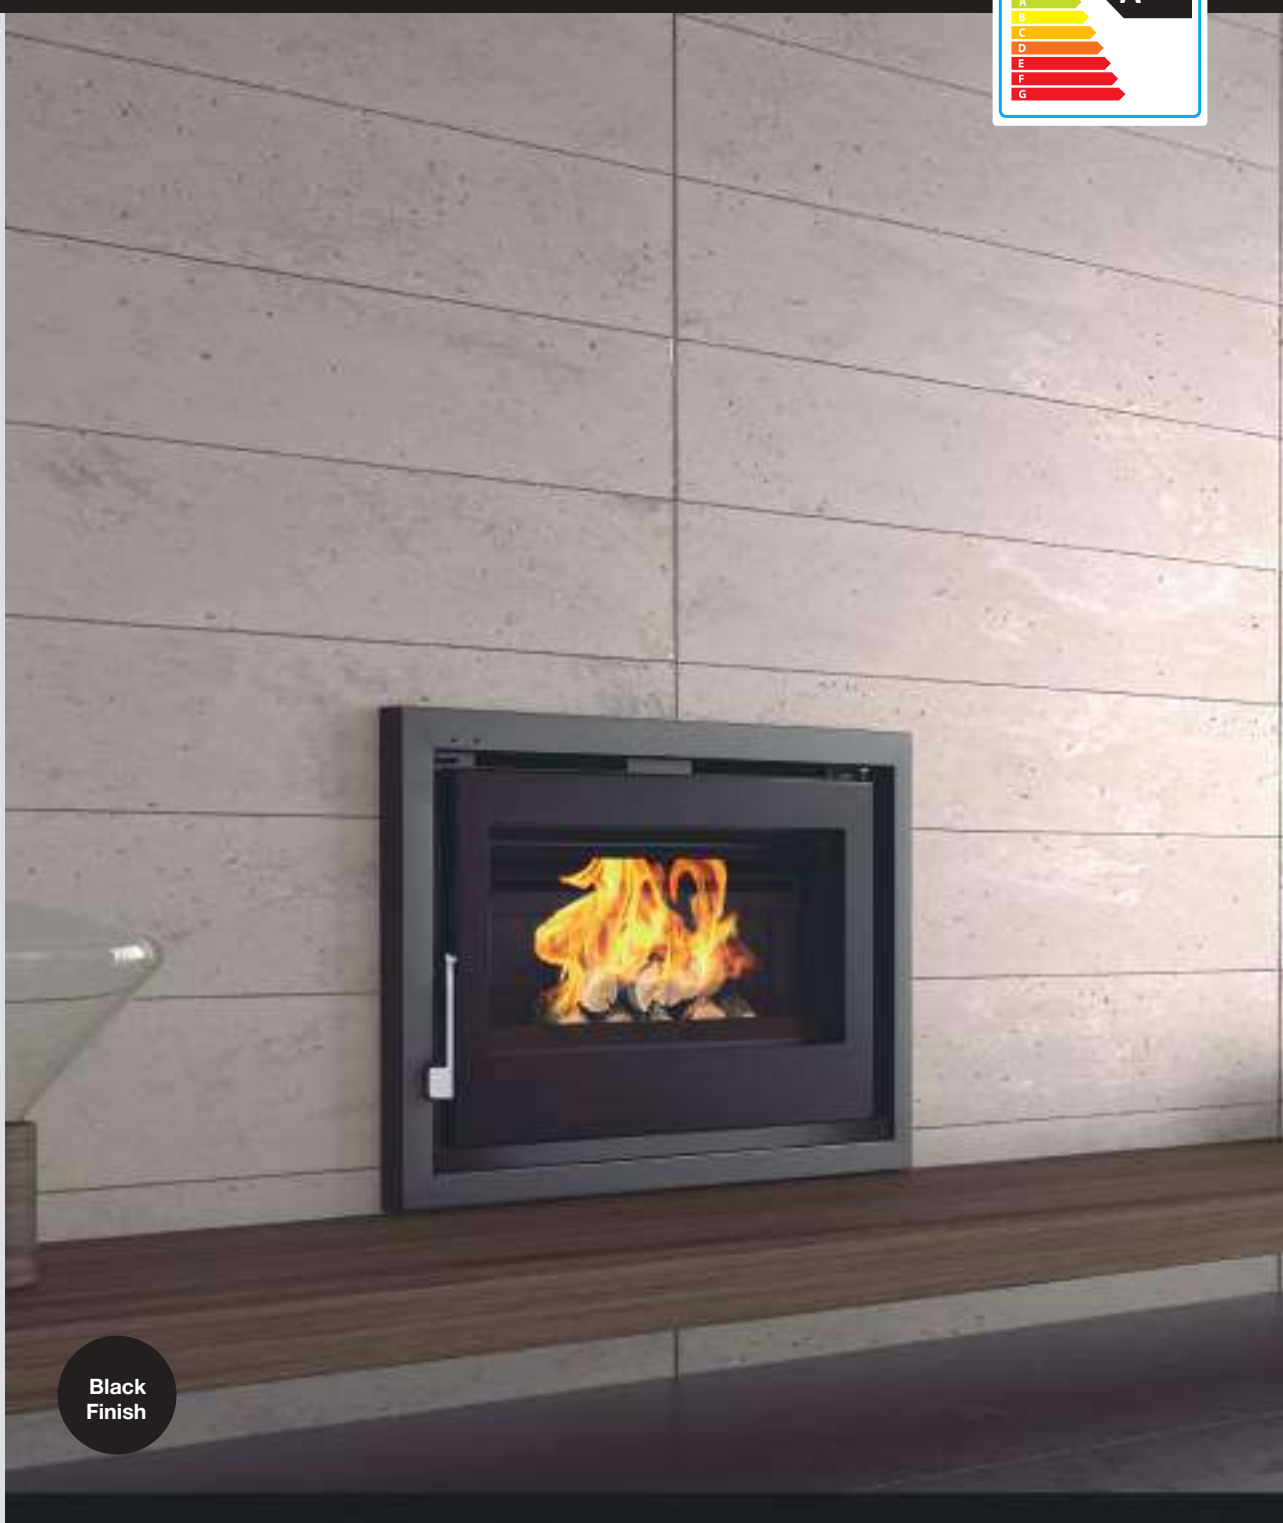

**Black
Finish**

Constructed from Steel up to 4 mm thick
Cast Iron Door and Grate
Removable Ash Drawer
Double Combustion Chamber
Two Axial Fans de 160 m³/h and 20 W
2-Speed Switch
Safety Thermostat Set to Position 0
Male Cast Iron Flue Outlet

IT-165 F Cast Iron Interior

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Analog Fan Speed Controller

IT-165 FK Cast Iron Interior and Silk-screened Glass




Datasheet



70 CM WOOD INSERT WITH OVEN AND FANS OVEN TRAY OF 50 CM

NEW



KW

12,5 - 17 KW

%

81 %



0,12 %



18,04 mg/Nm³



62 cm



ø 150 mm



335 m³



122 Kg



797 x 715 mm
Height x Width



658 x 481 x 790 mm
Width x Depth x Height

Black
Finish



NEW

Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Cast Iron Door and Grate
Double Combustion System
Stainless Steel Oven Tray 500 x 350 x 60 mm
Stainless Steel Oven Grill 500 x 350 mm
Two Axial Fans 160 m³/h and 20 W
New Electronic System with 3 Speeds
Safety Thermostat Set to Position 0
Double Combustion
Chamber Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 4 Cast Iron Plates for the Combustion Chamber
Drip-Proof Sleeve ø 150 mm. Vitrified Black
2 Ø 80 mm Nozzles for Primary Air Ducting
Support Frame with Adjustable Legs

I-170 H Without Fans


IT-170 H With Fans



Datasheet



80 CM WOOD INSERT WITH OVEN AND FANS OVEN TRAY OF 60 CM



KW

13 - 18 KW

%

81 %

III

0,07 %

mg/Nm³

35,65 mg/Nm³

cm

75 cm

mm

ø 200 mm

m³

340 m³

Kg

150 Kg

mm

905 x 873 mm
Height x Width

mm

722 x 450 x 893 mm
Width x Depth x Height

**Black
Finish**



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Vermiculite Interior
Cast Iron Door and Grate
Double Combustion System
Stainless Steel Oven Tray 600 x 400 x 60 mm
Stainless Steel Oven Grill 600 x 400 mm
Two Axial Fans de 160 m³/h and 20 W
Safety Thermostat Set to Position 0
Double Combustion Chamber
Male Cast Iron Flue Outlet

ACCESSORIES/ ADD-ONS (See pages 131-133)

800°C Heatproof Spray Paint 375 ml. (Black Color)
Set of 4 Cast Iron Plates for the Combustion Chamber
Drip-Proof Sleeve ø 150 mm. Vitrified Black
Analog Fan Speed Controller

I-180 H Without Fans

IT-180 H With Fans



Datasheet






PELLETS INSERT

gama



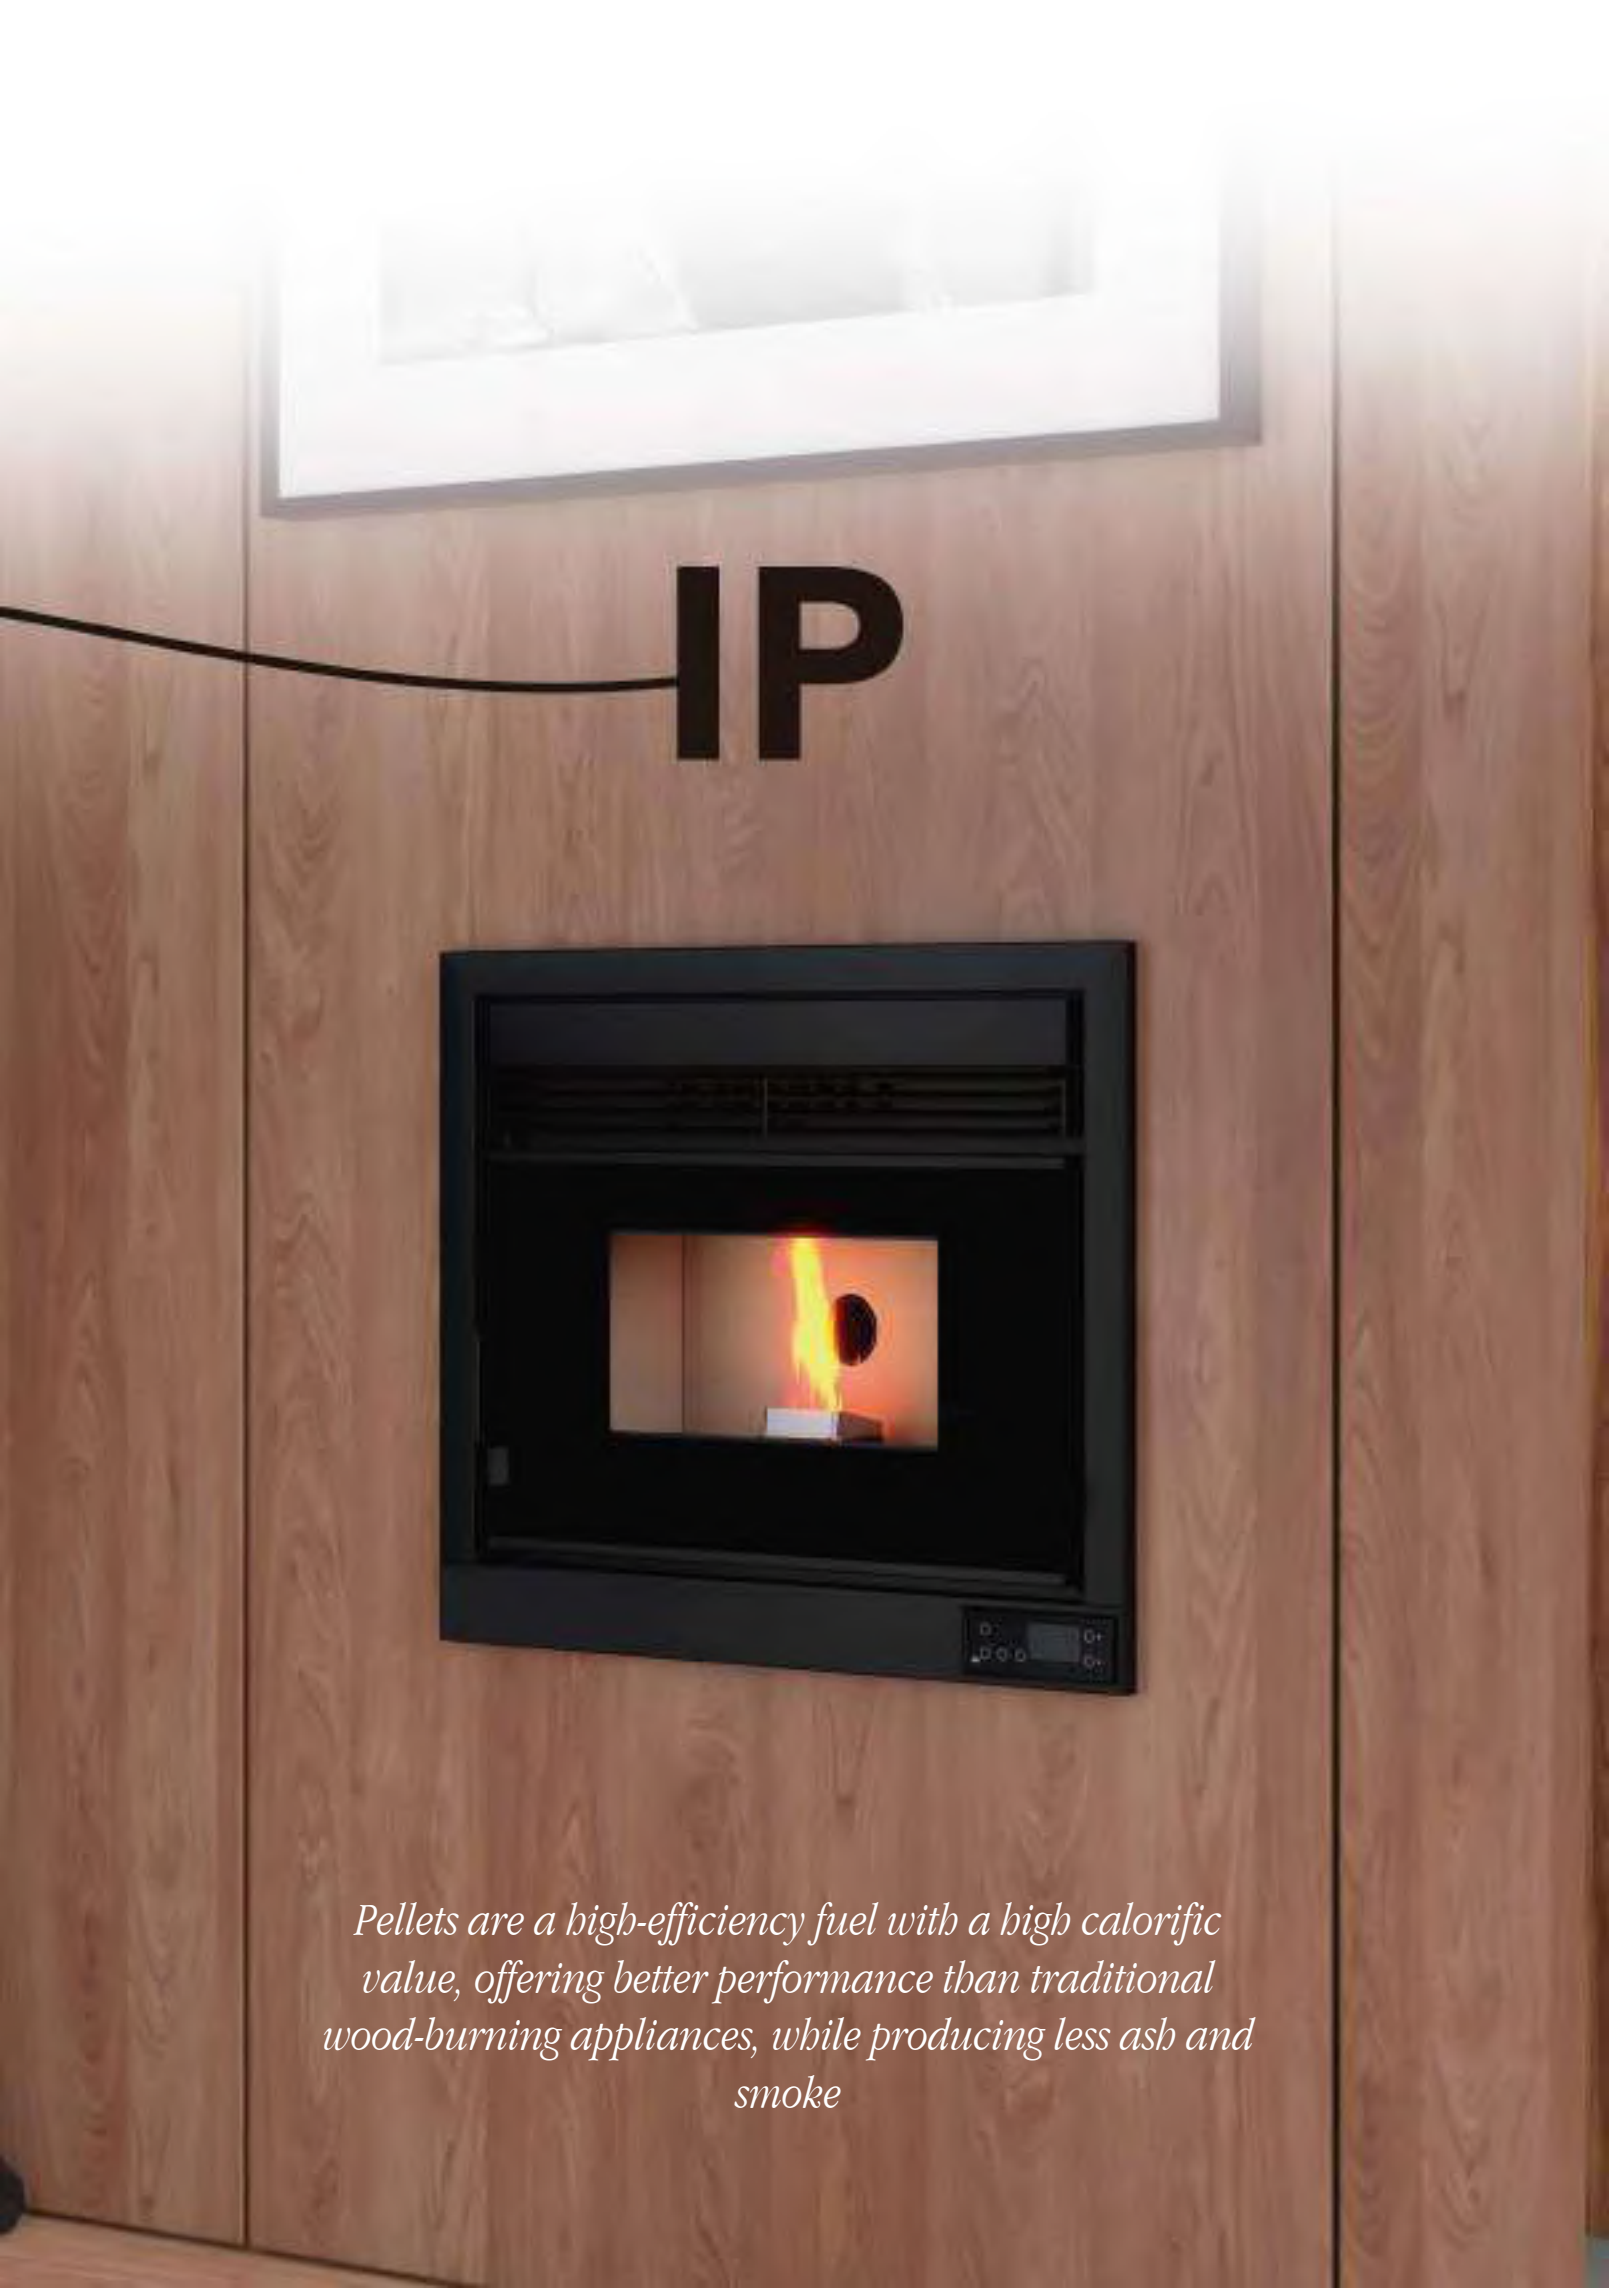


IP

Pellets are a high-efficiency fuel with a high calorific value, offering better performance than traditional wood-burning appliances, while producing less ash and smoke



10,5 KW PELLET INSERT IP-160 K



KW

9 - 10,5 KW

%

85 %

0,02 %

2,42 mg/Nm³

26 litros

ø 80 mm

240 m³

120 Kg

Programmable

653 x 713 mm
Height x Width

693 x 555 x 560 mm
Width x Depth x Height



Ceramic Ignition Resistor

Equipped with Cast Iron Heat Exchanger

Cast Iron Burner

Vermiculite Interior

Silk-screened Glass

ACCESSORIES/ ADD-ONS (See Page 134)

Adjustable Installation Frame – Height Range: 330–570 mm

Ducting Kit with External Pellet Hopper (front or side loading) – Ø 200 mm

Radio Frequency Remote Control – Version 2.0

Módulo WIFI V 2.0


Remote Control



Datasheet



11,5 KW PELLET INSERT



10 - 11,5 KW



89 %



0,02 %



9,07 mg/Nm³



23 litros



ø 80 mm



270 m³



135 Kg



Programmable



700 x 713 mm
Height x Width



690 x 596 x 607 mm
Width x Depth x Height



Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
RAC System
Remote Control

IP-170 Vermiculite Interior

IP-170 K Vermiculite Interior and Silk-Screened Glass

ACCESSORIES/ ADD-ONS (See Page 134)

Adjustable Installation Frame – Height Range: 330–570 mm
Hot air ducting kit for rear or top outlet – 160m³/h, 48W, Ø 80mm
Ducting Kit with External Pellet Hopper (front or side loading) – Ø 200 mm
Radio Frequency Remote Control – Version 2.0
Wi-Fi Module – Version 2.0



Datasheet

gama



PELLET STOVE


*Pellet stoves are the most
efficient option for heating a
home*

BP





HYDRO STOVE- 15 KW TO WATER BP-500 H



16 - 17 KW



94 %



0,01 %



12,91 mg/Nm³



32 litros



ø 80 mm



430 m³



135 Kg



14,8 KW



Programmable



503 x 481 x 939 mm
Width x Depth x Height



Black
Finish

Ceramic Ignition Resistor
Cast Iron Burner
Interior of Steel
RAC System

ACCESSORIES/ ADD-ONS (See Page 134)


Anti-condensation valve
Radio frequency remote control – Version 1.0
Wi-Fi Module – Version 2.0



Datasheet



7,5 KW FRONT PELLET STOVE BP-CH1



**NEW
DISPLAY**



KW

6,5 - 7,5 KW

%

85 %



0,02 %



17,69 mg/Nm³



27 litros



ø 80 mm



175 m³



70 Kg



Programmable



446 x 442 x 764 mm
Width x Depth x Height



BP-CH 1 BORDEAUX



BP-CH 1 WHITE



BP-CH 1 BLACK

Ceramic Ignition Resistor
Cast Iron Burner
Interior of Steel

ACCESSORIES/ ADD-ONS (See Page 134)


Reduced 90° Elbow for Right-Side Flue Outlet
Remote Control
Wi-Fi Module – Version 2.0



Datasheet



10 KW FRONT PELLET STOVE BP-100



8,5 - 9,75 KW



87 %



0,01 %



19,56 mg/Nm³



27 litros



ø 80 mm



230 m³



80 Kg



Programmable



408 x 442 x 851 mm
Width x Depth x Height



BP-100 BORDEAUX



BP-100 WHITE



BP-100 BLACK

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior

ACCESSORIES/ ADD-ONS (See Page 134)


Reduced 90° Elbow for Left-Side Flue Outlet
Remote Control
Wi-Fi Module – Version 2.0
Radio Frequency Remote Control – Version 2.0



Datasheet



10 KW FRONT PELLET STOVE WITH WIFI BP-100 C



8,5 - 9,75 KW



87 %



0,01 %



19,56 mg/Nm³



27 litros



ø 80 mm



230 m³



80 Kg



Programmable



571 x 448 x 850 mm
Width x Depth x Height



BP-100 C BORDEAUX



BP-100 C WHITE



BP-100 C BLACK

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior
Wi-Fi Module – Version 2.0


ACCESSORIES/ ADD-ONS (See Page 134)
Reduced 90° Elbow for Left-Side Flue Outlet
Remote Control
Radio Frequency Remote Control – Version 2.0



Datasheet



10 KW FRONT PELLET STOVE BP-100 R



KW

8,5 - 9,75 KW

%

87 %

III

0,01 %

19,56 mg/Nm³

27 litros

ø 80 mm

230 m³

90 Kg

Programmable

783 x 485 x 851 mm
Width x Depth x Height



BP-100 R BORDEAUX



BP-100 R WHITE



BP-100 R BLACK

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior

ACCESSORIES/ ADD-ONS (See Page 134)


Reduced 90° Elbow for Left-Side Flue Outlet
Remote Control
Wi-Fi Module – Version 2.0
Radio Frequency Remote Control – Version 2.0



Datasheet



11,5 KW FRONT PELLET STOVE **BP-170 K**



10 - 11,5 KW



89 %



0,02 %



9,07 mg/Nm³



23 litros



Ø 80 mm



270 m³



130 Kg



Programmable



699 x 500 x 851 mm
Width x Depth x Height



BP-170 K BORDEAUX



BP-170 K WHITE



BP-170 K BLACK

Ceramic Ignition Resistor

Equipped with Cast Iron Heat Exchanger

Cast Iron Burner

Vermiculite Interior

RAC System

Silk-screened Glass

ACCESSORIES/ ADD-ONS (See Page 134)

Hot Air Ducting Kit – 160 m³/h, 48 W, Ø 80 mm

Remote Control

Radio Frequency Remote Control – Version 2.0

Wi-Fi Module – Version 2.0




Datasheet

Optional:
One Air Duct





12 KW FRONT PELLET STOVE BP-200



10 - 12 KW



90 %



0,02 %



14,86 mg/Nm³



36 litros



ø 80 mm



270 m³



110 Kg



Programmable



503 x 481 x 940 mm
Width x Depth x Height



BP-200 BORDEAUX



BP-200 WHITE



BP-200 BLACK

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior

ACCESSORIES/ ADD-ONS (See Page 134)


Reduced 90° Elbow for Left-Side Flue Outlet
Remote Control
Wi-Fi Module – Version 2.0
Radio Frequency Remote Control – Version 1.0



Datasheet



12KW DUCTABLE FRONT PELLET STOVE BP-201



10 - 12 KW



90 %



0,02 %



14,86 mg/Nm³



36 litros



ø 80 mm



270 m³



115 Kg



Programmable



503 x 481 x 1034 mm.
Width x Depth x Height



BP-201 BORDEAUX



BP-201 WHITE



BP-201 BLACK

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior
Air Ducting – 160 m³/h, 48 W, Ø 80 mm

ACCESSORIES/ ADD-ONS (See Page 134)


Reduced 90° Elbow for Ductable Hot Air Outlet – Right-Side, Rear or Top
Secondary Hot Air Ducting Kit: 160 m³/h, 48 W, Ø 80 mm
Remote Control
Wi-Fi Module – Version 2.0
Radio Frequency Remote Control – Version 1.0



Datasheet



17,5 KW FRONT PELLET STOVE BP-700



KW

16 - 17,5 KW

%

92 %

0,01 %

6,44 mg/Nm³

50 litros

ø 80 mm

430 m³

145 Kg

Programmable

528 x 597 x 1089 mm
Width x Depth x Height



BP-700 BORDEAUX



BP-700 WHITE



BP-700 BLACK

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior RAC System

ACCESSORIES/ ADD-ONS (See Page 134)


Remote Control
Radio Frequency Remote Control – Version 2.0
Wi-Fi Module – Version 2.0



Datasheet



DUCTABLE 17.5 KW FRONT PELLET STOVE BP-701



16 - 17,5 KW



92 %



0,01 %



6,44 mg/Nm³



50 litros



Ø 80 mm



430 m³



155 Kg



Programmable




528 x 597 x 1204 mm
Width x Depth x Height



BP-701 BORDEAUX



BP-701 WHITE



BP-701 BLACK

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior
RAC System
Air Ducting – 160 m³/h, 48 W, Ø 80 mm

ACCESSORIES/ ADD-ONS (See Page 134)

Reduced 90° Elbow for Ductable Hot Air Outlet – Right-Side, Rear or Top
Secondary Hot Air Ducting Kit: 160 m³/h, 48 W, Ø 80 mm

Remote Control

Wi-Fi Module – Version 2.0

Radio Frequency Remote Control – Version 2.0




Datasheet



9KW HALLWAY PELLET STOVE BP-300

NEW



7 - 9 KW



91 %



0,02 %



12,90 mg/Nm³



17 litros



ø 80 mm



195 m³



85 Kg



Programmable



734 x 222 x 934 mm
Width x Depth x Height



NEW



BP-300 BORDEAUX/BLACK



BP-300 WHITE/BLACK



BP-300 BLACK/WHITE

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior

ACCESSORIES/ ADD-ONS (See Page 134)


Reduced 90° Elbow for Right-side or Rear Flue Outlet
Remote Control
Wi-Fi Module – Version 2.0
Radio Frequency Remote Control – Version 2.0



Datasheet



12 KW HALLWAY PELLET STOVE BP-402



KW

10 - 12 KW

%

90 %

0,02 %

7,68 mg/Nm³

23 litros

ø 80 mm

270 m³

130 Kg

Programmable

838 x 321 x 1030 mm
Width x Depth x Height

BP-402 BORDEAUX/
BLACK

BP-402 WHITE/
BLACK

BP-402 BLACK/
WHITE

Ceramic Ignition Resistor
Equipped with Cast Iron Heat Exchanger
Cast Iron Burner
Vermiculite Interior
RAC System
Vertical Flue Outlet Kit with Starting "T" Connector

ACCESSORIES/ ADD-ONS (See Page 134)
Reduced 90° Elbow for Right-side or Rear Flue Outlet
Reduced 90° Elbow for Ductable Hot Air Outlet – Side or Rear
Air Ducting Kit: 200 m³/h e 53 W Ø 80 mm
Remote Control
Radio Frequency Remote Control – Version 2.0
Wi-Fi Module – Version 2.0



Datasheet

OPTIONAL:
Two Air Ducts





gama



FUSIÓN



RANGE FUSIÓN with OVEN

CHARCOAL AND WOOD BBQ (FREESTANDING OR BUILT-IN) WITH DOORS, FRONT ELEVATOR SYSTEM AND STAINLESS STEEL OVEN



FUSIÓN 200 EP

DATASHEET



NEW



FUSION 200 EP

1665 x 1933 x 840
Height x Width x Depth

1117 x 1860
Height x Width

420 x 600 x 400
Height x Width x Depth

600 x 400
Width x Depth

860 x 550
Width x Depth

600 x 400 x 60
Width x Depth x Height

456 kg

ø 350 mm.

ø 85 mm.

Constructed from Steel up to 4 mm thick
Hood and Flue outlet included
Includes Paella Pan Support
Cast Iron Doors on the Wood-Fired Oven
Glove

Removable Ash Drawers
BBQ and Oven Base in Refractory Brick
Includes Cast Iron Grates in the BBQ and the Oven
Interior of the Wood Oven Combustion Chamber in Vermiculite
Includes Black Heat-Resistant Spray Paint Bottle: 800 °C (Non-Rust-Proof) 375 ml

Black
Finish

Accessories and Complements

Support Furniture with Wheels (See page 117)
Ref.: 7B0066

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

RANGE FUSIÓN with OVEN

CHARCOAL AND WOOD BBQ (FREESTANDING AND BUILT-IN) WITH FRONT LIFT SYSTEM AND WOOD-FIRED OVEN

FUSIÓN 160 E

DATASHEET



Accessories and Complements
Support Furniture with Wheels (See page 117)
Ref.: 7B0005

FUSIÓN 200 E

DATASHEET



Accessories and Complements
Support Furniture with Wheels (See page 117)
Ref.: 7B0007



FUSION 160 E	1620 x 1440 x 744 Height x Width x Depth	1011 x 1440 Height x Width	500 x 350 x 60 Height x Width x Depth	500 x 350 Width x Depth	543 x 560 Width x Depth	500 x 350 x 60 Width x Depth x Height	300 kg	ø 300 mm.	ø 65 mm.
FUSION 200 E	1730 x 1840 x 740 Height x Width x Depth	1117 x 1840 Height x Width	420 x 600 x 400 Height x Width x Depth	600 x 400 Width x Depth	725 x 560 Width x Depth	600 x 400 x 60 Width x Depth x Height	360 kg	ø 350 mm.	ø 85 mm.

Constructed from Steel up to 4 mm thick
Hood and Flue Outlet Included
Includes Paella Pan Support
Cast Iron Doors on the Wood-Fired Oven
Glove

Removable Ash Drawers
BBQ and Oven Base in Refractory Brick
Includes Cast Iron Grates in the BBQ and the Oven
Interior of the Wood Oven Combustion Chamber in Vermiculite
Includes Black Heat-Resistant Spray Paint Bottle: 800 °C (Non-Rust-Proof) 375 ml

**Black
Finish**

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

RANGE FUSIÓN with OVEN

CHARCOAL AND WOOD BBQ (FREESTANDING AND BUILT-IN) WITH STAINLESS STEEL WOOD-FIRED OVEN

FUSIÓN 140

DATASHEET



Accessories and Complements

Support Furniture with Wheels (See page 117) Ref.: 7B0020
Front Elevator Grill (See page 122) Ref.: 7B0057

FUSIÓN 160

DATASHEET



Accessories and Complements

Support Furniture with Wheels (See page 117) Ref.: 7B0005
Front Elevator Grill (See page 122) Ref.: 7B0062

FUSIÓN 200

DATASHEET



Accessories and Complements

Support Furniture with Wheels (See page 117) Ref.: 7B0007
Front Elevator Grill (See page 122) Ref.: 7B0058



FUSIÓN 140	1458 x 1350 x 580 <i>Height x Width x Depth</i>	900 x 1352 <i>Height x Width</i>	230 x 485 x 360 <i>Height x Width x Depth</i>	475 x 350 <i>Width x Depth</i>	640 x 560 <i>Width x Depth</i>	450 x 350 x 60 <i>Width x Depth x Height</i>	235 kg	ø 300 mm.	ø 60 mm.
FUSIÓN 160	1620 x 1440 x 744 <i>Height x Width x Depth</i>	1014 x 1440 <i>Height x Width</i>	500 x 350 x 60 <i>Height x Width x Depth</i>	500 x 350 <i>Width x Depth</i>	670 x 665 <i>Width x Depth</i>	500 x 350 x 60 <i>Width x Depth x Height</i>	300 kg	ø 300 mm.	ø 65 mm.
FUSIÓN 200	1730 x 1840 x 740 <i>Height x Width x Depth</i>	1117x1840 <i>Height x Width</i>	420 x 600 x 400 <i>Height x Width x Depth</i>	600 x 400 <i>Width x Depth</i>	890 x 665 <i>Width x Depth</i>	600 x 400 x 60 <i>Width x Depth x Height</i>	360 kg	ø 350 mm.	ø 85 mm.

Constructed from Steel up to 4 mm thick
Hood and Flue Outlet Included
Includes Paella Pan Support, regulável em 4 alturas
Cast Iron Doors on the Wood-Fired Oven
Glove

Removable Ash Drawers
BBQ and Oven Base in Refractory Brick
Includes Cast Iron Grates in the BBQ and the Oven
Interior of the Wood Oven Combustion Chamber in Vermiculite
Includes Black Heat-Resistant Spray Paint Bottle: 800 °C (Non-Rust-Proof) 375 ml

Black
Finish

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

SUPPORT FURNITURE RANGE FUSIÓN

SUPPORT FURNITURE

FUSIÓN 140

REF: 7B0020



690 x 1363 x 600
Height x Width x Depth



50 kg

SUPPORT FURNITURE

FUSIÓN 160 / 160 E

REF: 7B0005



717 x 1490 x 760
Height x Width x Depth



85 kg

SUPPORT FURNITURE

FUSIÓN 200 / 200 E

REF: 7B0007



717 x 1844 x 760
Height x Width x Depth



100 kg

SUPPORT FURNITURE

FUSIÓN 200 EP

REF: 7B0066



680 x 1846 x 718
Height x Width x Depth



113 kg

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

gama


fm

Simply having a good barbecue in the garden allows us to enjoy unique moments, spend time relaxing and having fun, while taking the opportunity to prepare original recipes designed for the grill.

BF



RANGE **BF** BIG SIZE

CHARCOAL AND WOOD BBQ (FREESTANDING AND BUILT-IN)



DATASHEET



Accessories and Complements

Support Furniture (See page 121)) Ref.: 7B0019
Front Elevator Grill (See page 122) Ref.: 7B0062
Drip-Proof Sleeve Ø 250 mm – Vitrified Black (See Page 135)
Ref.: 7Z0031



DATASHEET



Accessories and Complements

Support Furniture (See page 121)) Ref.: 7B0010
Front Elevator Grill (See page 122) Ref.: 7B0062



DATASHEET



Accessories and Complements

Support Furniture (See page 121)) Ref.: 7B0011
Front Elevator Grill (See page 122) Ref.: 7B0058



BF-60	1220 x 668 x 578 <i>Height x Width x Depth</i>	830 x 668 <i>Height x Width</i>	640 x 560 <i>Width x Depth</i>	95 kg	ø 250 mm.	ø 60 mm.
BF-70	1310 x 780 x 720 <i>Height x Width x Depth</i>	890 x 780 <i>Height x Width</i>	670 x 625 <i>Width x Depth</i>	150 kg	ø 300 mm.	ø 65 mm.
BF-90	1360 x 1000 x 720 <i>Height x Width x Depth</i>	890 x 1000 <i>Height x Width</i>	890 x 625 <i>Width x Depth</i>	190 kg	ø 300 mm.	ø 85 mm.

Constructed from Steel up to 4 mm thick
Hood and Flue Outlet Included
Includes Paella Pan Support, regulável em 4 alturas
Includes Black Heat-Resistant Spray Paint Bottle: 800 °C (Non-Rust-Proof) 375 ml

Removable Ash Drawer
BBQ base and sides lined with refractory brick
Includes Cast Iron grates



WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

SUPPORT FURNITURE RANGE **BF**

SUPPORT FURNITURE BF-60

REF: **7B0019**



SUPPORT FURNITURE BF-70

REF: **7B0010**



SUPPORT FURNITURE BF-90

REF: **7B0011**



 690 x 680 x 690
Height x Width x Depth

 35 kg

 690 x 980 x 740
Height x Width x Depth

 55 kg

 690 x 980 x 740
Height x Width x Depth

 65 kg

**Black
Finish**

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

FRONT ELEVATOR GRILL



**Models BF-60
FUSIÓN 140**

REF: 7B0057



DATASHEET



- Includes Stainless Steel Grill
- Grill Dimensions: 455 x 465 mm
- Equipment dimensions: 408 x 535 x 545 mm (Height/Width/Depth)
- Weight: 15 kg
- Constructed from Steel up to 3 mm thick

**Models BF-70
FUSIÓN 160**

REF: 7B0062



DATASHEET



- Includes Stainless Steel Grill
- Grill Dimensions: 543 x 560 mm
- Equipment dimensions: 470 x 630 x 620 mm (Height/Width/Depth)
- Weight: 19 kg
- Constructed from Steel up to 3 mm thick

**Models BF-90
FUSIÓN 200**

REF: 7B0058



DATASHEET



- Includes Stainless Steel Grill
- Grill Dimensions: 725 x 560 mm
- Equipment dimensions: 470 x 800 x 620 mm (Height/Width/Depth)
- Weight: 21 kg
- Constructed from Steel up to 3 mm thick



COMPATIBLE WITH EVERY
VERSION OF THE RANGE BF
AND FUSION



All our barbecues are built with high-quality materials for use with firewood and offer greater durability than charcoal grills

BARBECUE *Round with Plate Warmer*

BH-7

DATASHEET



Constructed from Steel up to 4 mm thick
Removable Ash Drawer
Black Heat- Resistant Paint: 800 °C (Non-Rust-Proof)
Removable Metal Grate
Primary Air Regulation
Secondary Air Regulation
Fuel: Firewood
Log Inlet Diameter: Ø 270 mm
Maximum Log Length: 55 cm
Combustion Chamber width: Ø 370 mm

INCLUDES

Glove / Upper Grill for Roasting / Lifter for Top Lid Removal

ACCESSORIES/ ADD-ONS:

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof), 375 ml



785 x 480 x 420



ø 120 mm.



40 kg

**Black
Finish**





gama



*A barbecue is the perfect excuse to host lunches,
dinners, parties, or gatherings with your loved ones.*

BH



RANGE HOME

BARBECUE WITH STAINLESS STEEL OVEN WITH DOORS

BHE-100 HP

WITHOUT FANS

DATASHEET



BHE-100 HPT

WITH FANS

DATASHEET



Two Axial Fans de 160 m³/h and 20 W x 2 (220v)
2-Speed Switch Safety Thermostat set to Position 0



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof), 375 ml
Ref.: 410H14
Drip-Proof Sleeve Ø 250 mm – Vitrified Black
Ref.: 7Z0031



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof), 375 ml
Ref.: 410H14
Drip-Proof Sleeve Ø 250 mm – Vitrified Black
Ref.: 7Z0031



Horno



Barbacoa



BHE-100 HP
BHE-100 HPT

1335 x 1050 x 763
Height x Width x Depth

275 x 645 x 400
Height x Width x Depth

600 x 400
Width x Depth

870 / 670 x 500
Width / Width x Depth

600 x 400 x 60
Width x Depth x Height

235 kg

ø 250 mm.

Equipped with Cast Iron Grate
Removable Ash Drawer
Primary Air Regulation
Constructed from Steel up to 4 mm thick
Silk-screened Glass 750 °C
Steel Doors

Flue Damper Valve
Removable Deflector
Fuel: Firewood
Thermometer
Oven Base in Refractory Brick
Black Heat-Resistant Paint: 800 °C (Non-Rust-Proof)
Glove

**Black
Finish**

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

BUILT-IN BARBECUE WITH OVEN AND DOORS

BH-180 HP

Cast Iron Doors

DATASHEET



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof), 375 ml
Ref.: 410H14
Drip-Proof Sleeve Ø 250 mm – Vitrified Black
Ref.: 7Z0031

BH-100 HP

Steel Doors

DATASHEET



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof), 375 ml
Ref.: 410H14



Horno



Barbacoa



BH-180 HP

1315 x 810 x 600
Height x Width x Depth

980 x 810
Height x Width

275 x 500 x 400
Height x Width x Depth

500 x 350
Width x Depth

670 / 520 x 400
Width 1 / Width 2 x Depth

500 x 350 x 60
Width x Depth x Height

140 kg

ø 250 mm.

BH-100 HP

1590 x 1250 x 730
Height x Width x Depth

1250 x 1025
Height x Width

275 x 645 x 400
Height x Width x Depth

600 x 400
Width x Depth

870 x 670 x 500
Width 1 / Width 2 x Depth

600 x 400 x 60
Width x Depth x Height

182 kg

ø 300 mm.

Equipped with Cast Iron Grate
Removable Ash Drawer
Primary Air Regulation
Constructed from Steel up to 4 mm thick
Silk-screened Glass 750° C
Glove

Flue Damper Valve
Removable Deflector
Fuel: Wood
Thermometer
Oven Base in Refractory Brick
Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)

Black
Finish

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

RANGE HOME

BUILT-IN BARBECUE WITHOUT DOORS

BH-170

DATASHEET



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)
Ref.: 410H14

Drip-Proof Sleeve Ø 200 mm – Vitrified Black. Ref.: 7Z0030

BH-180

DATASHEET



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)
Ref.: 410H14

Drip-Proof Sleeve Ø 200 mm – Vitrified Black. Ref.: 7Z0030

BH-100

DATASHEET



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)
Ref.: 410H14

Drip-Proof Sleeve Ø 250 mm – Vitrified Black. Ref.: 7Z0031



Barbacoa



BH-170

945 x 715 x 540

Height x Width x Depth

580 x 715

Height x Width

570 / 430 x 400

Width 1 /Width 2 x Depth

70 kg

ø 200 mm.

BH-180

965 x 810 x 580

Height x Width x Depth

630 x 810

Height x Width

670 / 520 x 400

Width 1 /Width 2 x Depth

85 kg

ø 200 mm.

BH-100

1025 x 1025 x 765

Height x Width x Depth

645 x 1025

Height x Width

870 / 670 x 500

Width 1 /Width 2 x Depth

105 kg

ø 250 mm.

Equipped with Cast Iron Grate
Removable Ash Drawer
Primary Air Regulation
Constructed from Steel up to 4 mm thick
Glove

Flue Damper Valve
Removable Deflector
Fuel: Wood
Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)

**Black
Finish**

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

RANGE HOME

BUILT-IN BARBECUE WITH DOORS

BH-170 P

Cast Iron Door

DATASHEET



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)
Ref.: 410H14
Drip-Proof Sleeve Ø 200 mm – Vitrified Black. Ref.: 7Z0030

BH-180 P

Cast Iron Door

DATASHEET



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)
Ref.: 410H14
Drip-Proof Sleeve Ø 200 mm – Vitrified Black. Ref.: 7Z0030

BH-100 P

Steel Door

DATASHEET



Accessories and Complements (See Page 135)

Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)
Ref.: 410H14
Drip-Proof Sleeve Ø 250 mm – Vitrified Black Ref.: 7Z0031



Barbacoa



BH-170 P

945 x 715 x 540
Height x Width x Depth

580 x 715
Height x Width

570 / 430 x 400
Width 1 / Width 2 x Depth

70 kg

Ø 200 mm.

BH-180 P

965 x 810 x 580
Height x Width x Depth

630 x 810
Height x Width

670 / 520 x 400
Width 1 / Width 2 x Depth

85 kg

Ø 200 mm.

BH-100 P

1025 x 1025 x 765
Height x Width x Depth

645 x 1025
Height x Width

870 / 670 x 500
Width 1 / Width 2 x Depth

105 kg

Ø 250 mm.

Equipped with Cast Iron Grate
Removable Ash Drawer
Primary Air Regulation
Constructed from Steel up to 4 mm thick
Silk-screened Glass 750° C

Flue Damper Valve
Removable Deflector
Fuel: Wood
Black Heat-Resistant Spray Paint: 800 °C (Non-Rust-Proof)
Glove

Black
Finish

WARNING: To use this equipment indoors, a forced extraction system must be installed to ensure proper evacuation of gases.

Accessories and COMPLEMENTS



ACCESSORIES / COMPLEMENTS **WOOD**



CUSTOM FRAME
Mod. Range C-300 y C-104
(Price per meter from 2.40 meters Height)

Code: 7Z0001



CUSTOM FRAME
Mod. Range C-200.
(Price per meter from 2.40 meters Height)

Code: 7Z0002



STAINLESS STEEL OVEN TRAY
Oven 320 x 220 x 48 mm. Thickness 0.3 mm.
Mod. CH-3, CH-4, CH-4 R, CH-5 H,
M-104 and M-105 H

Code: 840H46



STAINLESS STEEL OVEN TRAY
Oven 450 x 350 x 60 mm. Thickness 0.8 mm.
Mod. M-106, M-106 R, M-107 C, CH-8 and
CH-8 R

Code: 840H49



STAINLESS STEEL OVEN TRAY
Oven 500 x 350 x 60 mm. Thickness 0.8 mm.
Mod. HL-100, HLI-100, HL-100 R,
C-300 H, C-300 RH, M-107, M-107 RT and
IT-170 H

Code: 840H48



STAINLESS STEEL OVEN TRAY
Oven 600 x 400 x 60 mm. Thickness 0.8 mm.
Mod. CH-9, CH-9 R, HL-200, HLI-200,
HL-200 R, C-200 H, C-200 RH and IT-180 H

Code: 840H47



STAINLESS STEEL OVEN GRILL
450 x 350 mm.
Mod. CH-8, CH-8 R, M-106,
M-106 R and M-107 C

Code: 820H06



STAINLESS STEEL OVEN GRILL
500 x 350 mm.
Mod. HL-100, HLI-100, HL-100 R, C-300 H,
C-300 RH, M-107, M-107 RT and IT-170 H

Code: 820H05



STAINLESS STEEL OVEN GRILL
600 x 400 mm.
Mod. CH-9, CH-9 R, HL-200, HLI-200,
HL-200 R, C-200 H, C-200 RH and
IT-180 H

Code: 7Z0009



**DRIP-PROOF SLEEVE Ø
150 MM**

Vitrified Black. For All Models with Ø 150 mm
Male Flue Outlet.

Code: 7Z0029



**DRIP-PROOF SLEEVE
Ø 200 MM**

Vitrified Black. For All Models with Ø 200 mm
Male Flue Outlet.

Code: 7Z0030



**DRIP-PROOF SLEEVE
Ø 250 MM**

Vitrified Black. For All Models with Ø 250 mm
Male Flue Outlet.

Code: 7Z0031

ACCESSORIES / COMPLEMENTS **WOOD**



SET OF 2 CAST IRON PLATES

Mod. M-106, M-106 R and M-107

Code: 7Z0014



SET OF 2 CAST IRON PLATES

Mod. C-303 and C-203

Code: 7Z0015



SET OF 3 CAST IRON PLATES

Mod. C-302 D and C-302 I

Code: 7Z0016



SET OF 4 CAST IRON PLATES

Mod. I-170, I-180, IT-170 H and IT-180 H

Code: 7Z0018



SET OF 4 CAST IRON PLATES

Mod. C-300, C-300 H, C-200, C-200 H, C-200 R, C-200 RH, C-300 R and C-300 RH

Code: 7Z0019



IRON LOG HOLDER

*492 x 760 x 508 mm
(Height/Width/Depth)
Mod. CH-9*

Code: 7Z0027



IRON LOG HOLDER

*503 x 1240 x 800 mm
(Height/Width/Depth)
Mod. CH-9 R*

Code: 7Z0290



IRON LOG HOLDER

*375 x 815 x 495 mm
(Height/Width/Depth) Mod.
HL-100*

Code: 7Z0023



IRON LOG HOLDER

*372 x 1110 x 773 mm
(Height/Width/Depth)
Mod. HL-100 R*

Code: 7Z0024



IRON LOG HOLDER

*478 x 1003 x 530 mm
(Height/Width/Depth) Mod.
HL-200*

Code: 7Z0025



IRON LOG HOLDER

*375 x 1293 x 882 mm
(Height/Width/Depth) Mod.
HL-200 R*

Code: 7Z0026



SET OF 2 AXIAL FANS

*With Electronics and thermostat with Security
set to Position 0. Mod. I-180*

Code: 7Z0022

ACCESSORIES / COMPLEMENTS **WOOD**



WALL IRON PLATE PROTECTOR
900 x 705 mm. *Black Color*

Code: 7Z0046



ANALOG FAN SPEED CONTROLLER
for Insert and Stoves with Fans

Code: 7Z0047



SUPPORT FRAME WITH ADJUSTABLE LEGS
RANGE IC/IZ AND IT-170_172

Support Frame with Adjustable Legs
Regulable Height- 213 - 365 mm.

Code: 7Z0340



PRIMARY AIR DUCTING KIT

Set of 2 Nozzles for Primary Air Ducting. Panoramic Range and IT-170_172

Code: 7Z0345



HEAT RESISTANT SPRAY PAINT
800 °C. 375 ml. (Black Color)

Code: 410H14



KITCHEN COOKTOP MOD. M-170 PF

Code: 7Z0586

ROBAX® NightFlame

Elegant – with or without fire



SPECIAL GLASS FINISH NF ON DOOR

Every 100cm model with Silk-screened Glass

Code: 7Z0587

ROBAX® NightFlame

Elegant – with or without fire



SPECIAL GLASS FINISH NF ON LATERAL DOOR

Every 100cm model with Silk-screened Glass

Code: 7Z0588



AIR DUCTING KIT

Ø 120 mm. Mod. M-300 y M-300TFK

Code: 7Z0054

ACCESSORIES / COMPLEMENTS **PELLETS**



SUPPORT FRAME WITH ADJUSTABLE LEGS

Variable Height: 330 - 570 mm. Mod. IP-160 K,
IP-170 e IP-170 K

Code: 7S0270



TANK DUCTING KIT

Mod. IP-160 K

Code: 7S0268



TANK DUCTING KIT

Mod. IP-170 e IP-170 K

Code: 7S0200



AIR DUCTING KIT

Mod. BP-170 K

Code: 7S0267



AIR DUCTING KIT

Mod. IP-170 e IP-170 K

Code: 7S0269



AIR DUCTING KIT

Secondary ducting.
Mod. BP-201 y BP-701

Code: 7S0115



AIR DUCTING KIT

Mod. BP-402

Code: 7S0298



RADIO FREQUENCY REMOTE CONTROL V 1.0

with Internal Sensor.
Electronic HB02 y HB03

Code: 7S0122



RADIO FREQUENCY REMOTE CONTROL V 2.0

with Internal Sensor.
Electronic HB07 y HB08

Code: 320H85



WI-FI MODULE 2.0

For every model

Code: 320H83



REMOTE CONTROL

For every model except Bp-500H

Code: 320H82



REDUCED 90° ELBOW

for Ductable Air Outlet
Mod. BP-201, BP-402 y BP-701

Code: 511H74



REDUCED 90° ELBOW

for Lateral Flue Outlet – Models with Side
Outlet Option

Code: 511H74



ANTICONDESATION VALVE 1"

Mod. BP-500 H

Code: 512H22

ACCESSORIES / COMPLEMENTS BARBECUES

BH-170 and BH-170 P



- Stainless Steel Grill
- Width 1: 570 x Width 2: 430 x 400 mm
- Ref.: 7Z0042

BH-180, BH-180 P and BH-180 HP



- Stainless Steel Grill
- Width 1: 670 x Width 2: 520 x 400 mm
- Ref.: 7Z0043

BH-100, BH-100 P/HP and BHE-100 HP/HPT



- Stainless Steel Grill
- Width 1: 870 x Width 2: 670 x 500 mm
- Ref.: 7Z0044

BH-170, BH-170 P BH-180 and BH-180 P



- DRIP-PROOF SLEEVE Ø 200 MM
- Vitrified Black
- Male Flue Outlet Ø 200 mm.
- Ref.: 7Z0030

BH-180 HP, BH-100, BH-100 P and BF-60



- DRIP-PROOF SLEEVE Ø 250 MM
- Vitrified Black
- Male Flue Outlet Ø 250 mm
- Ref.: 7Z0031

HEAT RESISTANT SPRAY PAINT



- 800 ° C. 375 ml. Black Color. (Non-rust proof)
- Ref.: 410H14

FUSIÓN 140



- Stainless Steel Oven Tray Thickness: 0,8 mm
- Measurements: 450 x 350 x 60 mm
- Ref.: 840H49

FUSIÓN 160 and BH-180 HP



- Stainless Steel Oven Tray Thickness: 0,8 mm
- Measurements: 500 x 350 x 60 mm
- Ref.: 840H48

FUSIÓN 200, BH-100 HP and BHE-100 HP/HPT




- Stainless Steel Oven Tray Thickness: 0,8 mm
- Measurements: 600 x 400 x 60 mm
- Ref.: 840H47

FUSIÓN 140



- Stainless Steel Oven Grill
- Measurements: 475 x 350 m m
- Ref.: 7Z0339

FUSIÓN 160 and BH-180 HP



- Stainless Steel Oven Grill
- Measurements: 500 x 350 mm
- Ref.: 820H05

FUSIÓN 200, BH-100 HP and BHE-100 HP/HPT



- Stainless Steel Oven Grill
- Measurements: 600 x 400 mm
- Ref.: 7Z0009

Download our catalogue



Apdo. de correos 98
14900 LUCENA (Córdoba) España
Tfno. (0034) 957 501 101
fmcalefaccion@fmcalefaccion.com
www.fmcalefaccion.com

Follow us in

